



All contents given by this drawing and all needed semi-finished materials and auxiliary materials must be produced, processed, machined and finished in compliance to the REGULATION OF THE EUROPEAN PARLIAMENT AND COUNCIL CONCERNING THE REGISTRATION, EVALUATION, AUTHORIZATION AND RESTRICTION OF CHEMICALS (REACH) and the EUROPEAN UNION DIRECTIVE ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS).

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of a patent, utility model or design.

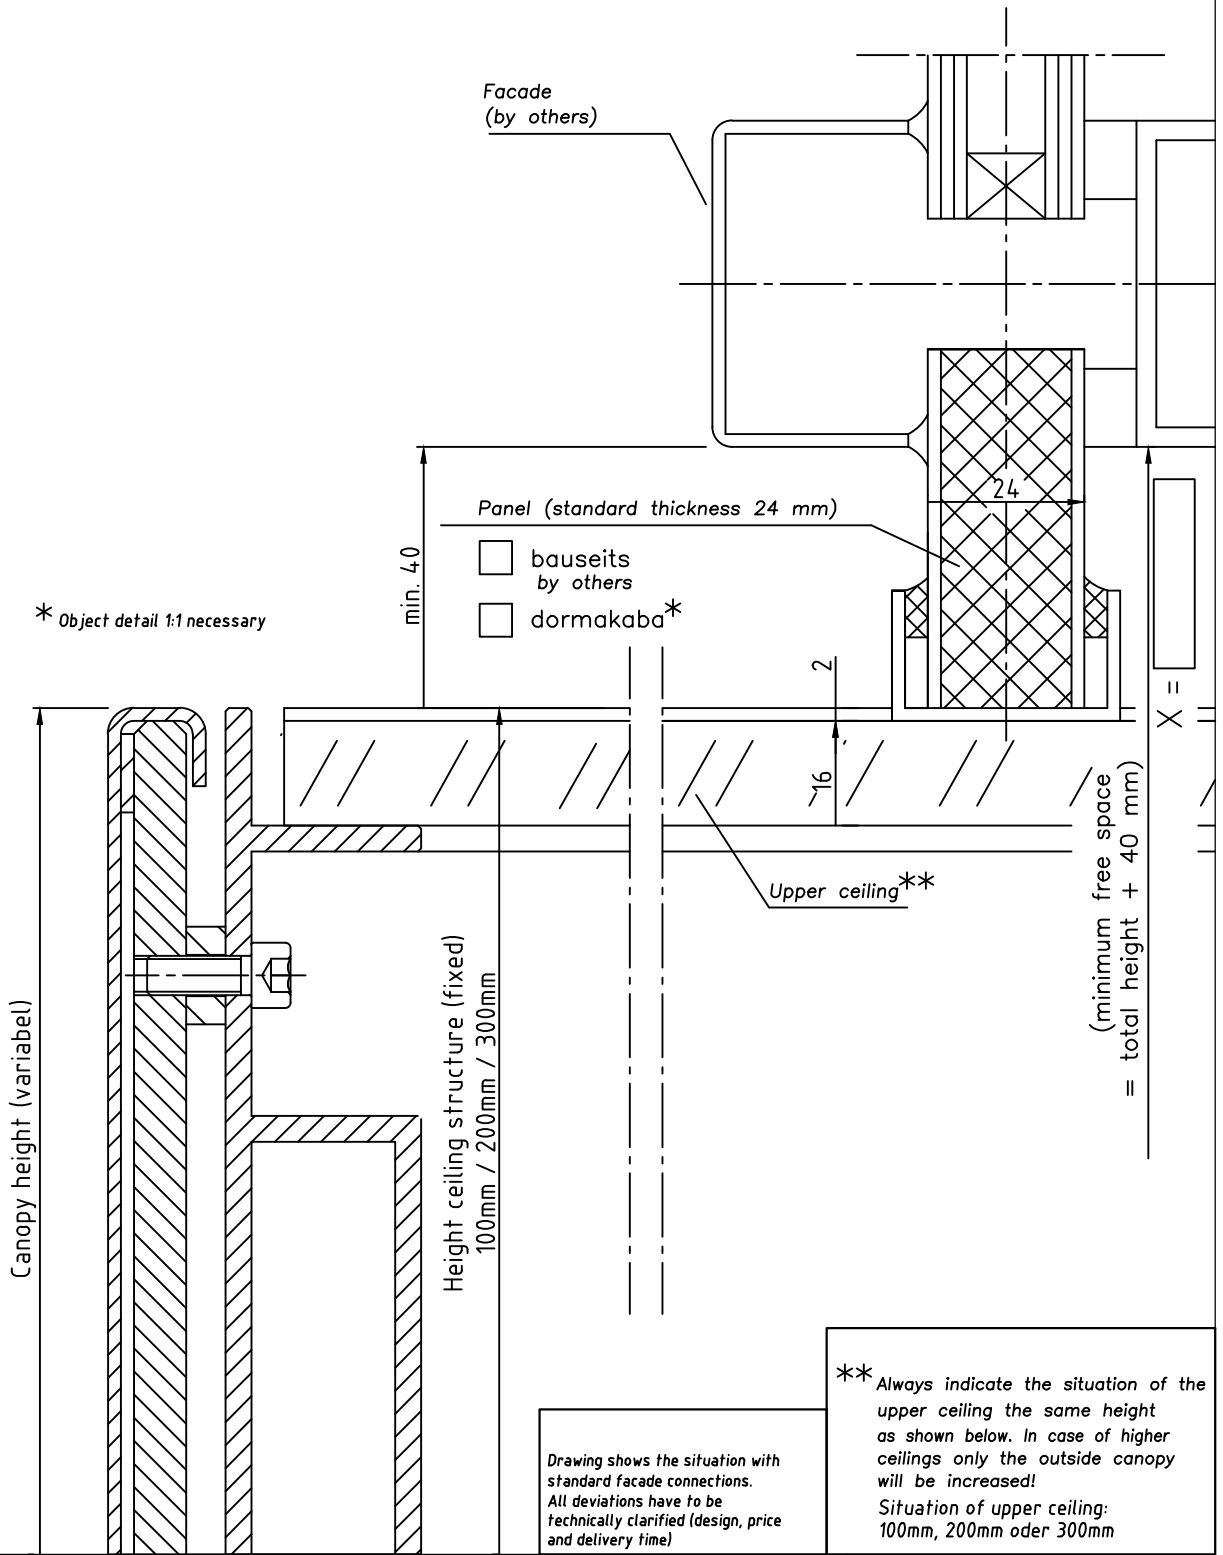

Drawing shows the situation with standard facade connections. All deviations have to be technically clarified (design, price and delivery time)

** Always indicate the situation of the upper ceiling the same height as shown below. In case of higher ceilings only the outside canopy will be increased!
 Situation of upper ceiling: 100mm, 200mm oder 300mm

Status: SERIAL PRODUCTION		Building Project / Commission:		Drawing Approval	
Modification					
		Customer:		Date / Name / Stamp	
		Sales Number:			
		Product:			
		Tolerances ISO 2768 part 1 and part 2, Tol.-cl. K			
		Drawn by:		Material:	Seller:
		Checked by:			Made from:
Scale		Title:			No.:
		KTV 3;4, rainproof ceiling			9501901621900
					Format: A4
					Sheet: