

RCI IL06 Door controller & emergency kit

For barrier-free access control



Applications

- Barrier free washroom with emergency annunciation
- Public buildings and facilities
- Commercial buildings
- Airports
- Institutional buildings
- Educational facilities
- Correctional facilities
- Hotels and lodging

The IL06 is a multi-faceted door controller that is ideal for quick installations including barrier free access control. The IL06 provides multiple barrier-free control and security control options. It is able to trigger auto control relays (door openers & closers) along with communication actions such as emergency call, emergency release and multi-zone control. Recent building code changes require several enhancements to meet Barrier Free requirements, such as washroom entrances, with emphasis on emergency assistance.


RCI's new ILO6 controller offers these features and meets or exceeds these requirements:

- 12-24VDC input
- 3 digit 8-segment LED display
- 6 1A @ 24VDC relay outputs SPDT
- 14 red/green I/O indicators
- 6 individual inputs and outputs
- 7 pre-programmed functions (with room for additional functions):
 - Function #1: Barrier-free washroom control with emergency call
 - Function #2: Barrier-free washroom with controlled access and emergency call
 - Function #3: Communicating washroom with auto-operator control and emergency call
 - Function #4: Communicating washroom with emergency call
 - Function #5: 2-Door security interlock with emergency release (mantrap - closed and locked continuous)
 - Function #6: 2-Door safety interlock with emergency release (air lock - closed and unlocked)
 - Function #7: Multi-zone control
- 6-zone control interface
- IL06 sold as a single controller or as part of a complete kit that includes the following items:
 - IL06 door controller
 - Interior & exterior handicap push plates
 - Push to lock button
 - Emergency call button
 - Interior & exterior annunciator (audible/visual indicators)
 - Surface applied door contact
 - Emergency call sign (will vary by province & state)
- FCC compliant
- ISED compliant

Specifications

Energy	12-24VDC input 6 1A @ 24VDC relay outputs SPDT
Indicators	14 red/green I/O indicators 3-digit 8-segment LED display
Input/output	6 input, 6 output programmable controller
Functions	Function #1: Barrier-free washroom control with emergency call. Function #2: Barrier-free washroom with controlled access and emergency call. Function #3: Communicating washroom with auto-operator control and emergency call. Function #4: Communicating washroom with emergency call. Function #5: 2-Door security interlock with emergency release (mantrap - closed and locked continuous) Function #6: 2-Door safety interlock with emergency release (air lock - closed and unlocked). Function #7: Multi-zone control.
Certifications and listings	FCC compliant ISED compliant

Dimensions

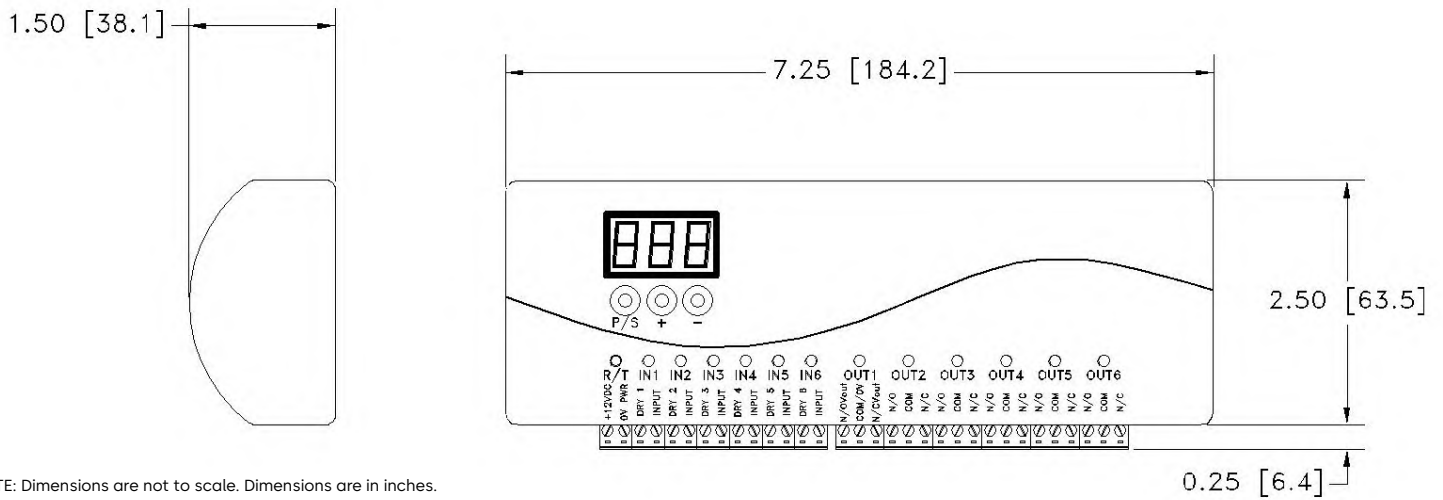

NOTE: Dimensions are not to scale. Dimensions are in inches.



© dormakaba 2024 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

Any questions? We would be happy to advise you.
Contact us at: 1-800-265-6630