

# High Security IP68 Rated Padlock

## P8065 CEN 5



**Description:**


High security applications including remote sites within the utility and infrastructure sectors as well as general perimeter security and security on track side/road side enclosures and cabinets.

A key is required to open and lock the shackle.

Suitable for universal indoor and outdoor use.

**Features:**

- 70mm hardened steel padlock and shackle
- Chrome plated
- 15mm diameter open shackle
- IP68 Standard: EN 60529:1991 + A1:2000 + A2:2013. IEC 60529:1989 + A1:1999 + A2:2013.
- Available with a 27mm or 50mm shackle clearance
- EN 12320 Grade 5 (CEN 5)
- Double locking hardened stainless steel ball bearing
- Uses a Swedish oval cylinder
- LPCB approved (LPS 1654: Issue 1 SR3) with Key Systems expert (plus), quattro plus (+) and Kaba 20
- Padlock Retention chain available separately
- Rubber seal is delivered in black as standard

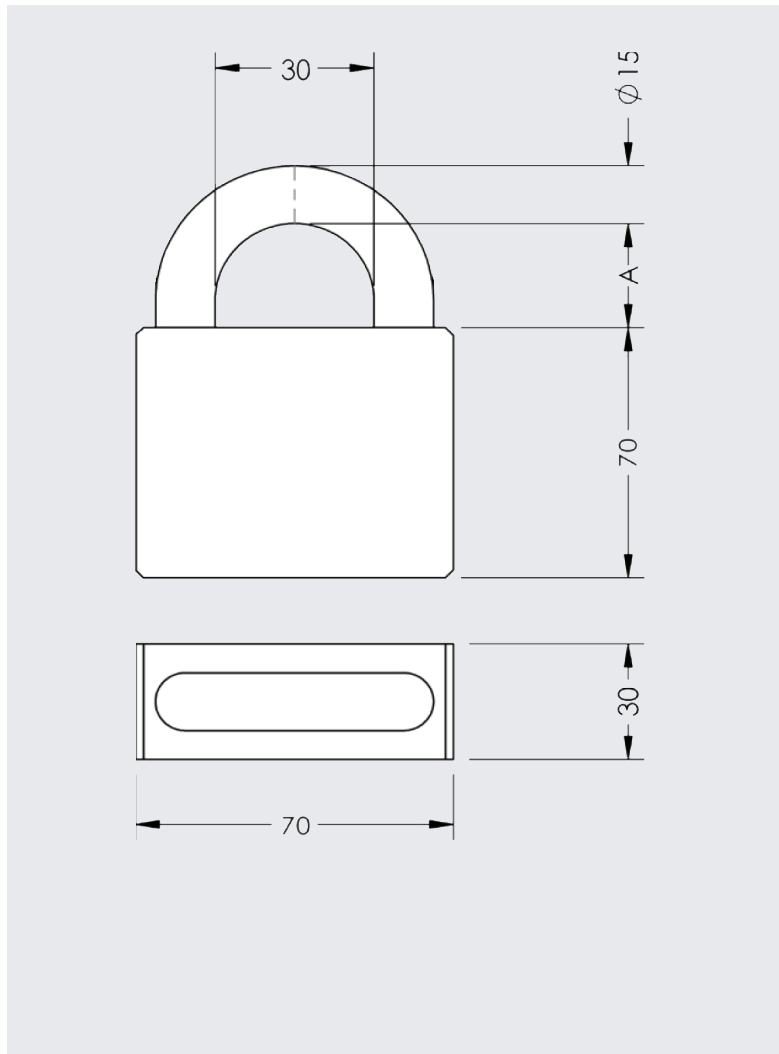

## Padlock Information

---

### Dimension A

- 27mm or 50mm

### Available Patented Systems:

- Kaba 20 (K37)
- quattro plus (K85)
- expert plus (K83)
- pextra Q (PXQ & PXQA)

### Available Legacy Systems:

- Kaba 20 (P1)
- quattro Plus (K58)
- expert (K56)
- pextra+ (PXP & PXPA)

**PDS-072-02**

**Any questions? We would be happy to advise you.**

Contact us on: **01884 256464**