

HSW EASY SAFE

—

Translation of the Original Operating Manual

EN

Prior to operating the HSW EASY Safe system:

Please carefully read and follow the instructions in this operating manual to facilitate the operation and to prevent faulty operations. Always keep the manual within reach!

1. General information

DORMA recommends the use of:

- ESG-H (heat-soaked single-pane safety glass) according to EN 12150-1.
- Laminated safety glass according to EN ISO 12543-1.

DORMA glass fittings are not suitable for rooms in which chemicals (e.g. chlorine) are used, e.g. swimming pools, saunas and/or salt-water pools.

For those cases DORMA offers special glass fitting designs from its product portfolio that are suitable in such areas. The HSW Easy safe is designed for use on internal installations only. Please contact us for more information.

In order to ensure the long-term functional efficiency please note the following:


- For best results use only one hand to push or pull the panels.
- Always move only one panel at a time.
- Always move the panel slowly (at walking speed) in order to prevent the glass from breaking.
- Reduce the speed of motion of the panels before passing through junctions (angled system configurations) or before moving into the stacking area.
- Never allow the panels to run uncontrolled along the guide rail and push them with your hand along the entire section.
- In order to close the system, position and close each panel individually.
- Keep locks as well as the upper and lower locking devices in good working order.
- Keep all locking plates and locking bushes for locks and locking devices clean and free of dirt.
- You will find the name plate with the ID no. of your HSW EASY Safe system on the guide rail profile in the stacking area. You will find another name plate on the upper cover profile of the last panel in the stacking area.
- This name plate can also be found on the last page of this operating manual.

Please always indicate this ID no. in case of complaints. If you have several systems, please ensure that you indicate the number of the damaged system.

2. Floor lock on the lower door rail


Front locking bolt

- Operate the front locking bolt with your foot or hand.
- When you push down the front locking device with your foot or hand the bolt will be locked in a floor bushing. The panel is now fixed.
- The bolt will be unlocked by putting your foot underneath or by pulling out the front locking device by hand. The panel is now movable.

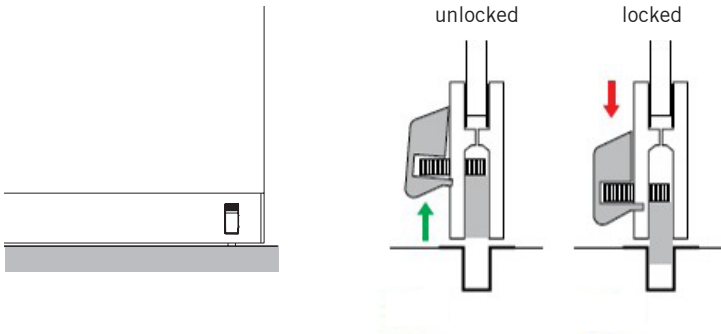


Lateral locking device

- Operate the lateral locking device with your foot.
- When you put your foot underneath the lateral locking device will be folded out and the bolt is then locked in a floor bushing. The panel is now fixed.
- The bolt will be unlocked again pushing down the lateral locking device with the foot. The panel is now movable.

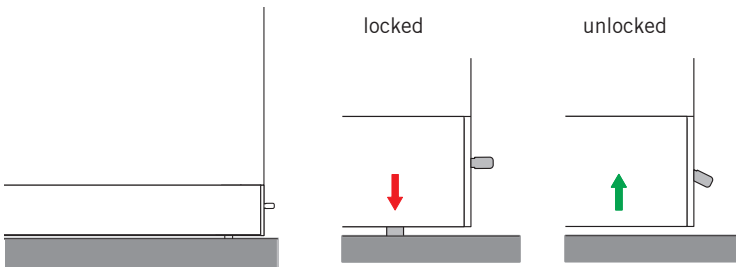

Lock with profile cylinder

- Turn the key in the direction of the glass edge in order to lock the panel in the floor bushing.
- Turn the key in the direction of the panel in order to unlock the panel again.

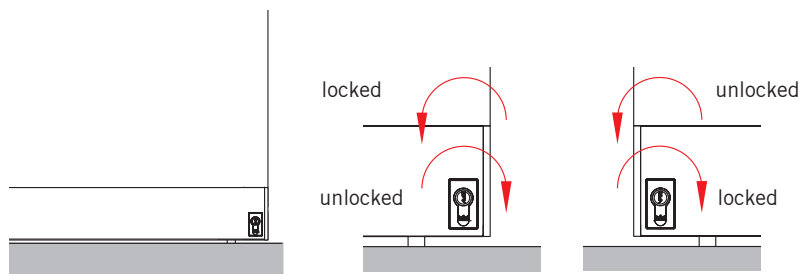


3. Maintenance and care


The fit and the operation as well as the adjustment of the system must be checked on a regular basis. Especially in case of highly frequented systems, the testing should be carried out by a specialist company or installing company. Damaged glass elements must be replaced immediately. Use only suitable cleaners and cleaning agents for cleaning the surfaces.

Cleaning of the floor bushings

Keep all locking plates and locking bushes on the floor for locks and locking devices clean and free of dirt.

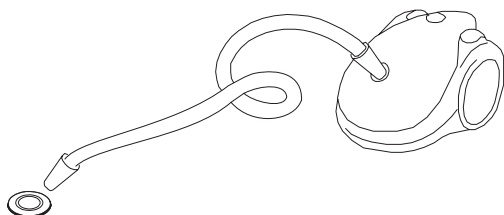

vacuuming



brushing

Manufacturer of the system:

Typenschild

In case of a problem with the system please contact the installing company:

Firmenstempel

The instruction in the operation of the system took place

on:

by: