

RCI 0163

1/2" Rim electric strike



This solenoid rim strike is a surface-mounted electric strike designed to work with Pullman style rim exit device latches.

Features

- Designed to fit in tight situations where the exit device is mounted very close to the door frame, e.g. aluminum storefront applications
- Solenoid technology
- For maximum latch engagement, the strike keeper has been designed to pivot out of the strike body versus rolling out of the strike
- Accommodates 1/2" (13 mm) latch projection
- Horizontal adjustment ensures proper latch positioning to compensate for door misalignment – up to 1/4" (6.4 mm)
- Shims may be added to the strike cavity to engage with misaligned deadlatch
- Lockdown holes for secure mount
- Cooler operation – runs cool to the touch; no suppressor kit needed
- High-grade stainless steel ensures superior strength and creates a sleek aesthetic
- Non-handed
- Plug-in wire connectors
- UL294 Listed for access control unit accessory
- UL1034 burglary-resistant listed



Energy
270mA
12VDC



Strength
1,500lb static
70ft-lb dynamic



Warranty
5 year limited warranty



Mode
Fail-secure




Endurance
500,000 cycles



Monitoring
Optional latch monitor model available

Factsheet

Specifications

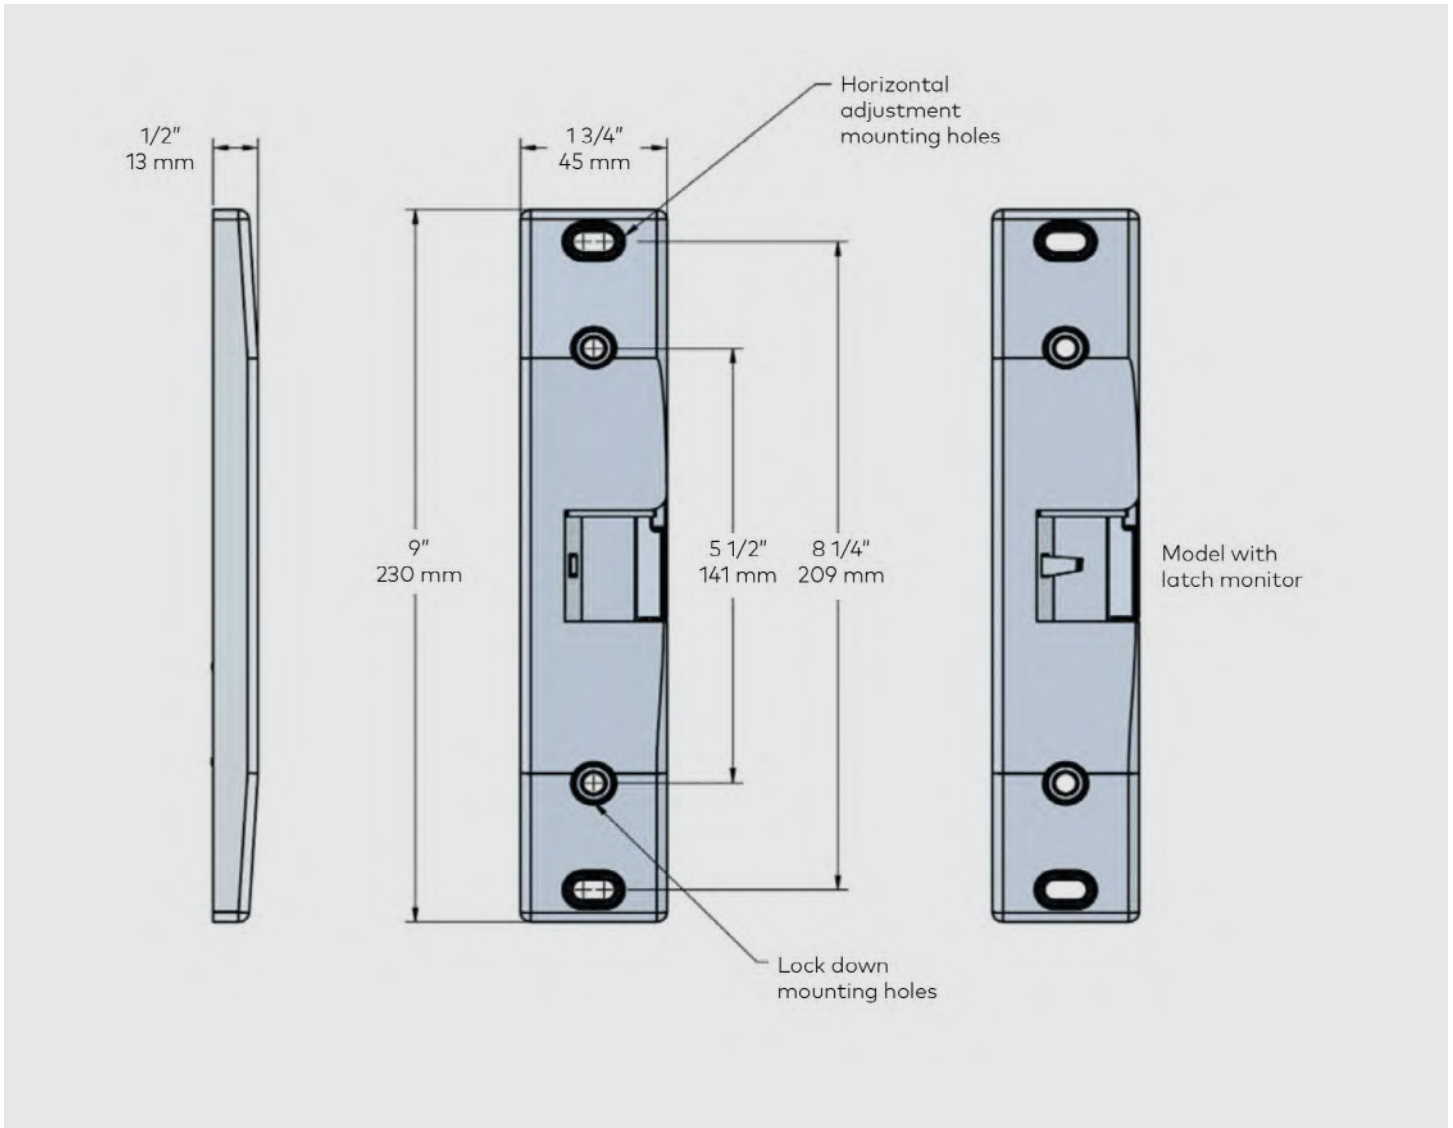

© dormakaba 2024 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

Any questions? We would be happy to advise you.
Contact us at: 1-800-265-6630