
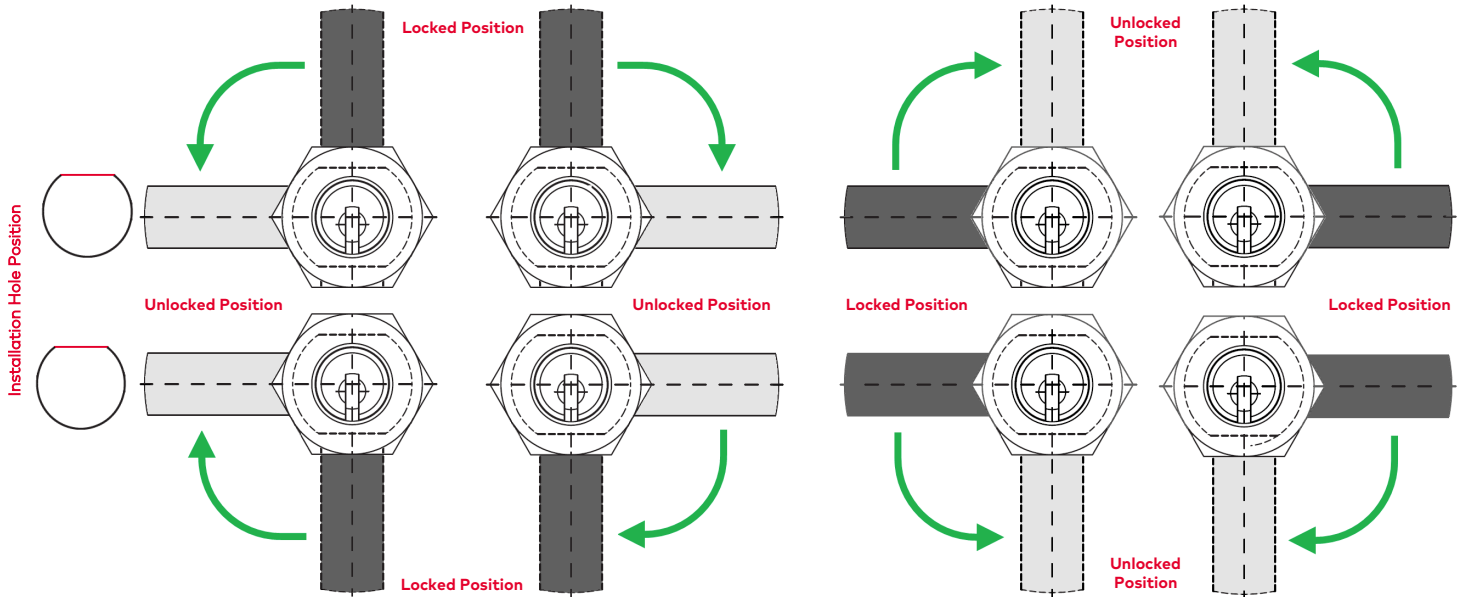


Camlock Handing Guide

1031/1061 Locks

Kaba 20

Kaba 20 cylinders are supplied with two flats on the housing. The orientation of the installation cutout has no impact on the cylinders ability to achieve the full spectrum of handing options. Standard keyway position = 6 o'clock position.



Quattro Plus

Quattro Plus/expert/expert Plus cylinders are supplied with a single flat on the housing. To achieve the full spectrum of handing options, it is necessary to rotate the mounting hole by 180 degrees which will intern adjust the position of the keyway from a 6 o'clock (standard) position to a 12 o'clock position.

