


P4661 CEN 3 Padlock

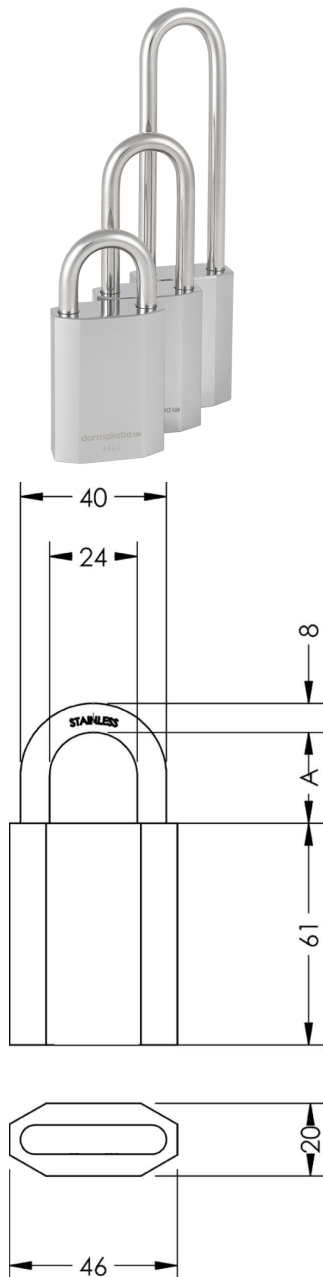

A= 25 / 60 or 110 mm

Application:

Suitable for universal indoor and outdoor use. High security applications including remote sites within the utility and infrastructure sectors, security and access control on control panels and enclosures.

Features:

- 46 mm brass bodied padlock with stainless steel shackle
- Chrome plated
- 8 mm diameter open shackle
- Spring loaded, self-locking and manual locking available
- Shackles available with 25mm, 60mm or 110 mm clearance
- EN 12320 Grade: 3 (CEN 3)
- Double locking hardened stainless steel ball bearing
- Uses a snowman cylinder
- Padlock Retention chain available

Available Systems:

- Quattro plus
- expert & expert plus
- pextra & pextra+

dormakaba UK & Ireland
Lower Moor Way
Tiverton
Devon
EX16 6SS

T: +44 (0)870 000 5625
E: info.gb@dormakaba.com

www.dormakaba.co.uk