


# CR4-4 STATION CONTROL RELAY MODULE



The CR4 module operates on 12V or 24V V DC and provides control of four (4) stations. Each CR4 station accepts a Dry (NO) trigger input and provides one (1) Fused 2Amp SPDT Output (jumper selectable Wet or Dry) and one (1) Non-fused Dry (2Amp) SPDT output. Closing a switch across the Dry Trigger Input or Station A, B, C or D will release the output for the amount of time that the trigger input is held closed. The CR4 module can be used to indicate status or implement multiple door interlocks.

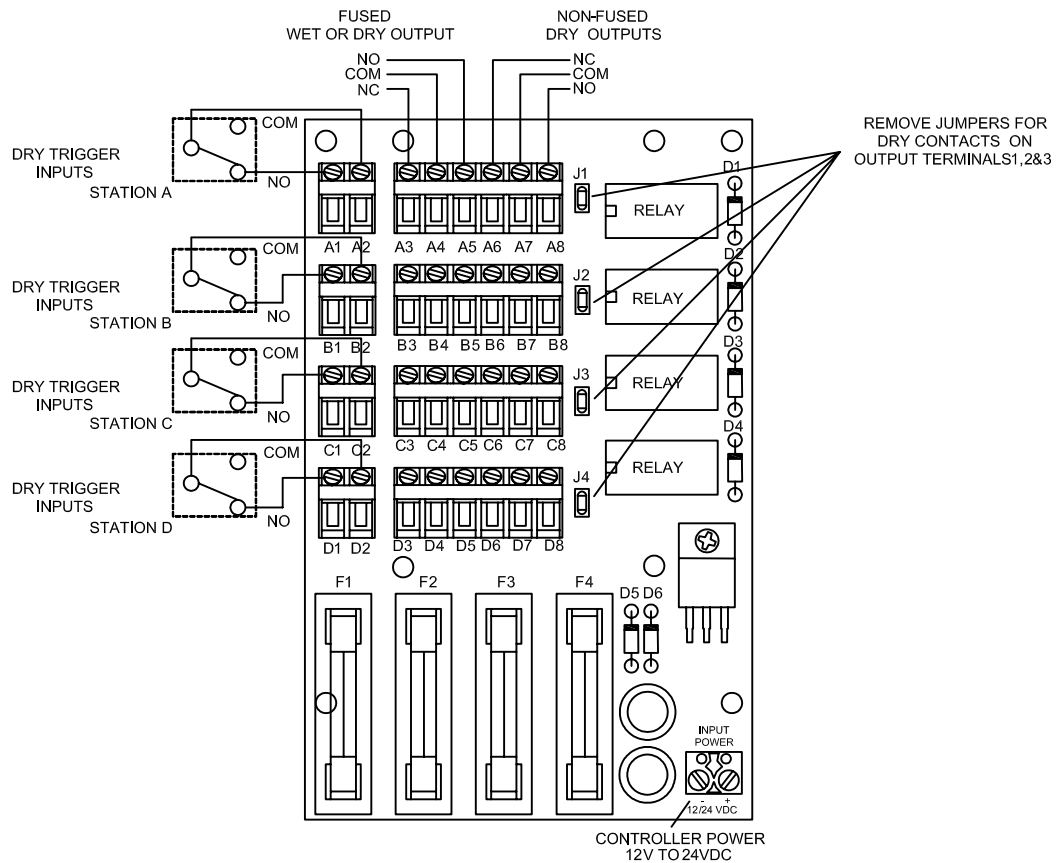

Controller Dimensions: 6" x 3" 15/16" (152mm x 77mm x 23mm)  
 Controller Input Voltage: 12V or 24VAC or DC: 0.15AMP Max.  
 Controller Stations: Four (4) Independent Stations  
 Control Inputs (Per Station): One (1) (Dry Contact Required)  
 Controller Outputs (Per Station): One (1) SPST Non Fused Dry Output  
 and  
 One (1) SPST Fused Wet or Dry Output  
 (Jumper selectable Wet or Dry)  
 Relay Contact Ratings: 2 AMP @ 30VDC (resistive)

\*