


# dormakaba registration unit 90 02

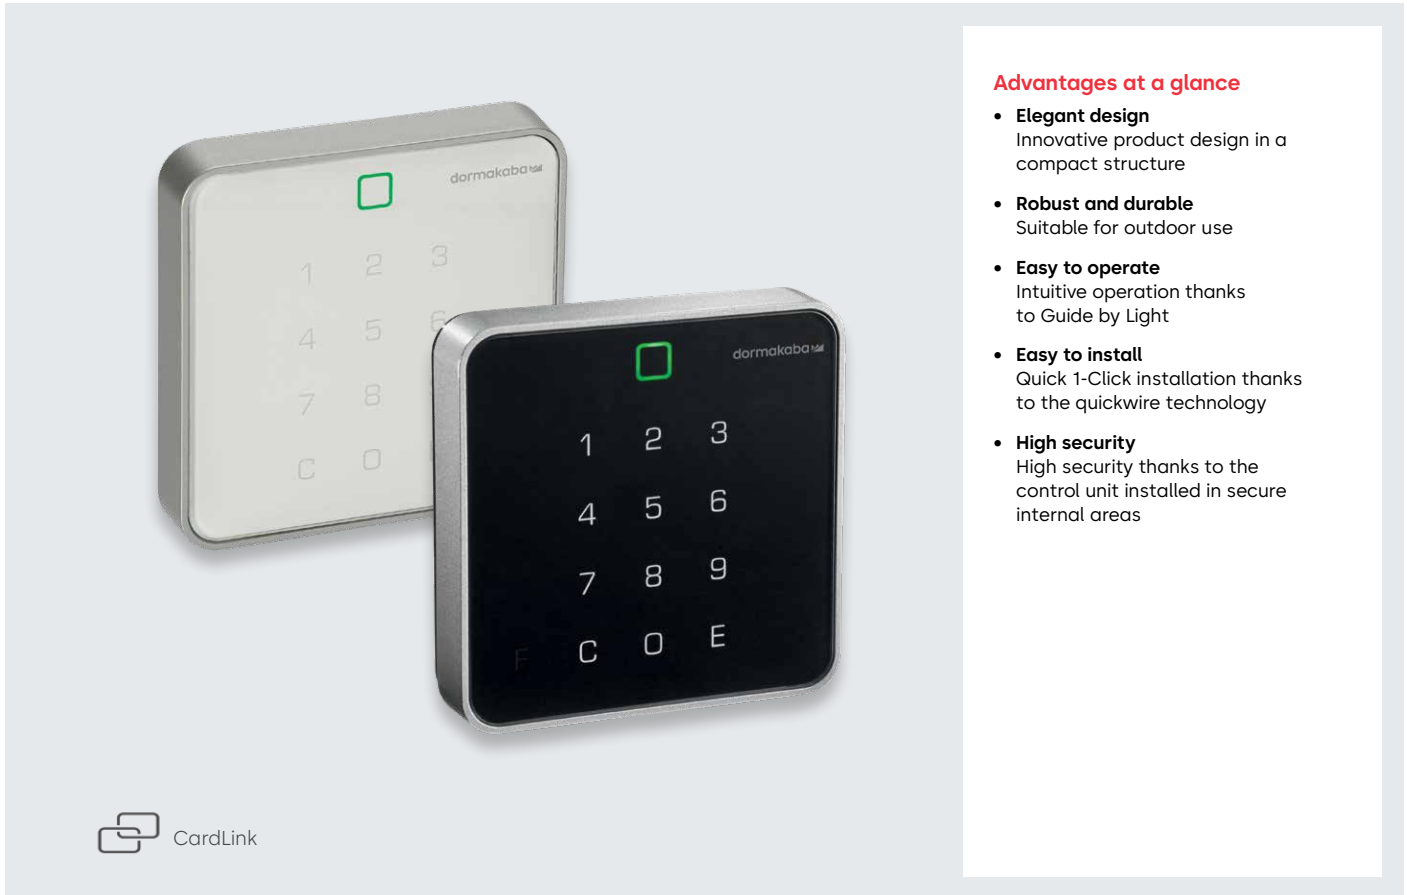

## Advantages at a glance

- **Elegant design**  
Innovative product design in a compact structure
- **Robust and durable**  
Suitable for outdoor use
- **Easy to operate**  
Intuitive operation thanks to Guide by Light
- **Easy to install**  
Quick 1-Click installation thanks to the quickwire technology
- **High security**  
High security thanks to the control unit installed in secure internal areas

## The reliable access solution with keypad

The dormakaba registration unit 90 02 offers an integrated keypad for access systems, providing flexible use for high security requirements. The registration unit is typically positioned away from the control unit. Regardless of the installation location, the accompanying dormakaba control unit can be installed in a tamper-proof area.

## Elegant and practical

The scratch-resistant glass surface, wearfree keys, aesthetic design and complete product portfolio also safeguard your investment in the case of intensive usage over a long operating period.

## Flexible installation

With the innovative quickwire technology, installation is quick and efficient.

## Function

The registration unit is fitted with an RFID interface and keypad to enable employees to be identified. The light symbol and acoustic signal generator inform the user if access has been granted or denied. Keypad operation is supported by Guide by Light.

## Areas of application

The dormakaba registration unit 90 02 is suitable for access points that require additional PIN verification for security reasons. It is designed for adverse operating conditions and can be used in both inside and outside.

### Innovative product design

The registration unit possesses an innovative design, comprising a silver frame and a high-gloss black front.

### User prompting

An acoustic signal and a light symbol (green/red) indicate whether access has been granted or denied. Access media are held up to the light symbol. If PIN entry is requested, the keypad will light up. Users are thereby assisted by Guide by Light.

### Installation

The registration unit can be installed on various surfaces, including directly onto metal, in internal and protected external areas. It is designed for surface cable mounting using a spacer frame and flush cable mounting using a rear panel. This allows the registration unit to be installed directly onto the wall or using a flush mounting box. The quickwire technology makes installation quick and secure.

### Quickwire technology

With the state-of-the-art quickwire technology, the entire wiring is separated from the electronics in the rear panel or spacer frame. The electronics are only clicked into the unit when it is commissioned – a practical concept that makes installation easier (1-Click installation).

### Compatibility

The dormakaba registration unit 90 02 operates using the following dormakaba control devices:

- dormakaba access manager 92 xx
- dormakaba access manager 92 3x
- dormakaba remote reader 91 15
- dormakaba remote reader 91 25

**Note:** The product's range of available functions depends on the system context in which it is used.

### Technical specification

#### Terminal

- communication via 50 Ω coaxial cable (RG 174/U recommended)

#### Transmission technologies

- RFID identification:
  - LEGIC advant, ISO 14443A
  - MIFARE® DESFire®, ISO 14443A
  - OSS-SO version 2021-06: LEGIC advant, MIFARE® DESFire®

#### Environmental conditions

- temperature: - 30°C to + 70°C
- humidity: 0 to 95%, non-condensing
- protection class:
  - IP54 (with rear panel & sealingmat)
  - IP40 (with spacer frame)

#### Design / material

- rear panel/spacer frame:
  - material: PC/ABS
  - colour: RAL 9005 (black)
  - RAL 9016 (white)
- frame:
  - material: PC/ABS
  - colour: RAL 9006, NCS S2502-B
- front:
  - material: autotex polyester film in PMMA
  - colour: RAL 9005 (black)
  - RAL 9016 (white)

#### Dimensions

- with rear panel:
  - 88.5 x 88.5 x 19.4 mm (W x H x D)
- with spacer frame:
  - 88.5 x 88.5 x 26.4 mm (W x H x D)

#### Certificates / standards


- EN 301 489-1, EN 301 489-3, EN 300 330-1, EN 300 330-2
- RED 2014/53/EU

Further details and order information can be found in the relevant dormakaba catalogues or system descriptions.


MIFARE and DESFire are registered trademarks of NXP B.V.

Subject to change without notice.  
© 2024 dormakaba. Version 09/2024

dormakaba registration unit 90 02  
Front and rear panel



Side view



surface  
mounted

flush-  
mounted

**Any questions? We will be happy to assist you.**

dormakaba International Holding AG | Hofwisenstrasse 24 | CH-8153 Rümlang | info.de@dormakaba.com | dormakaba.com