


InSync Multihousing RAC

(Remote Access Controller)

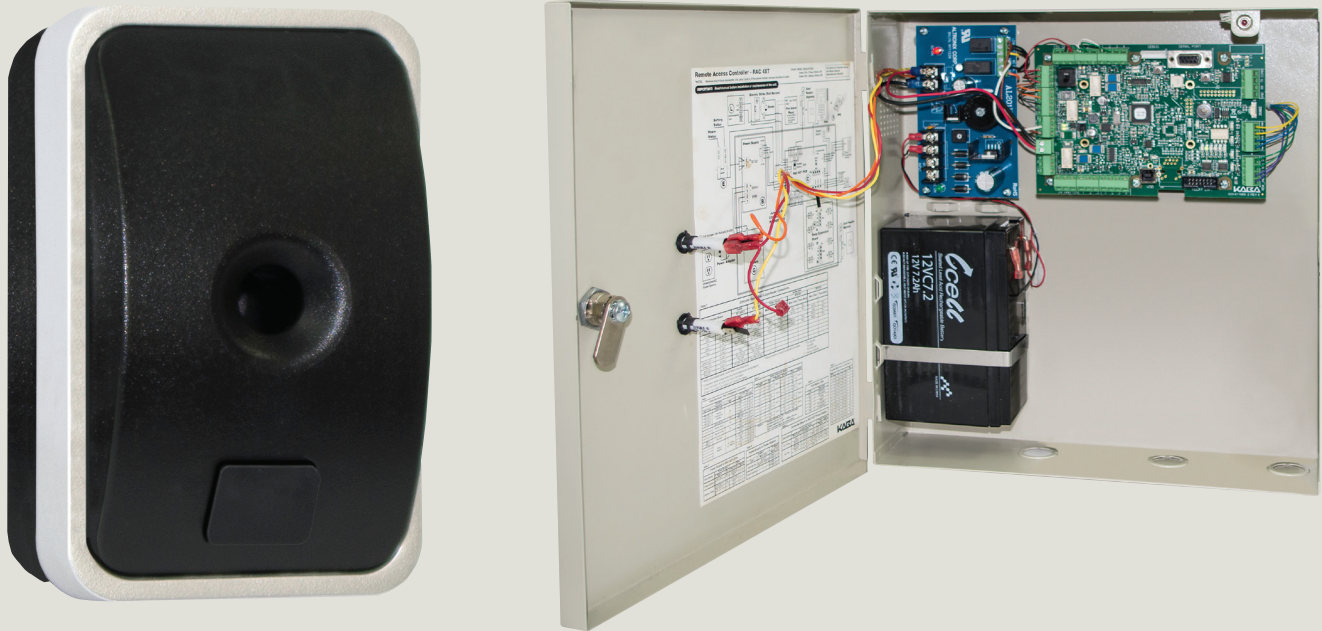

Overview

A Remote Access Controller (RAC) is a device that operates a special remote access point, such as parking gates, perimeter entrances or any other opening that is equipped with electrified hardware.

Reliable Operation

Includes a battery backup and self-contained power supply for maximum reliability.

Enhanced Security


The new fire drop inputs allow an alarm input to force the door to be unlocked in the event of an emergency. Remote open and Request to Exit (REX) button features give multihousing properties additional options to open doors ensuring resident safety.

Compatible with InSync Lock Series

As a compliment to the InSync lock series, the RAC enables multihousing properties to prevent tampering and grant access to common area doors.


Applications

- Remote access points - elevator, parking entrance, outdoor swimming pool
- Locking devices - electric strike, magnetic lock.

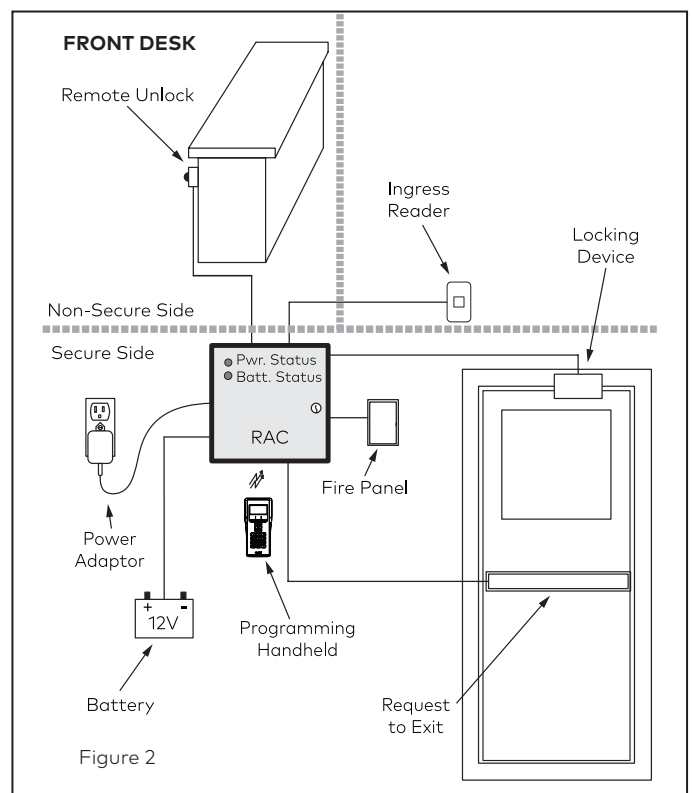

Controller Box Dimensions and Weight

Controller Box	RAC: 13.5" H x 12.375" W x 3.25" D (343 W x 314 H x 83 D mm), 14 lbs (6.4 kg)
Temperature Range	32°F to 120°F (0°C to 49°C). Must be sheltered against weather hazards and dripping water

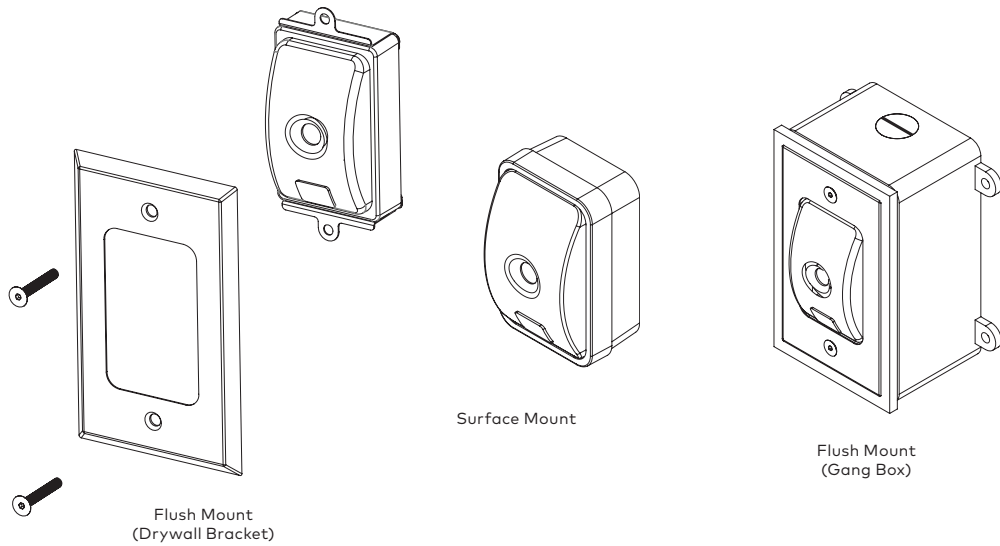

Reader Dimensions and Weight

Surface Mount	2.9"H x 1.9"W x 1.5"D (73mm H x 48mm W x 38mm D) Surface: 91g
Flush Mount (Drywall Bracket)	4.5"H x 2.8"W x 2.3"D (114mm H x 70mm W x 59mm D) 80g
Flush Mount (Gang Box)	4.5"H x 2.8"W x 2.6"D (114mm H x 70mm W x 67mm D) 80g
Temperature Range	-30°F to 150°F (-35°C to 66°C)
Maximum Cable Distance from Control Board	500 feet

Power/Battery

Battery	Battery is 12VDC – up to 4 hours of operation in event of power failure; Power supply is 24VAC/VDC input with 12VDC output
Audit Memory	2000
Finish	Satin Chrome edges (painted) and black front

Warranty

Standard Factory Warranty	One year
---------------------------	----------