

# ICU 200/200T

## Healthcare Manual Sliding Door



ICU300 shown

### Standard ICU Features


- Heavy-duty Delrin® rollers
- Simple operation
- Electrostatic discharge grounding
- Low maintenance
- Positive latch
- Easy installation

### Optional Features

- Self-closing panels **NEW!**
- Electric shutter strike for access control **NEW!**
- Remote panel status monitoring
- Muntins
- Speciality finish options
- 7" & 10" bottom rails
- Santoprene rubber weather stripping

### Description

ICU200 healthcare doors are available in a wide range of sizes, configurations, and finishes. Single, biparting, or telescopic doors are available with either two, three, four, or six panels. A recessed track or trackless guide system allows for easy operation with or without a floor track. The ICU200 allows for continuous observation of patients, while allowing quick and easy access during emergency conditions. The door is capable of emergency egress of the sliding panel when required. Emergency release hardware allows for the door to swing out in the direction of egress when pushed.

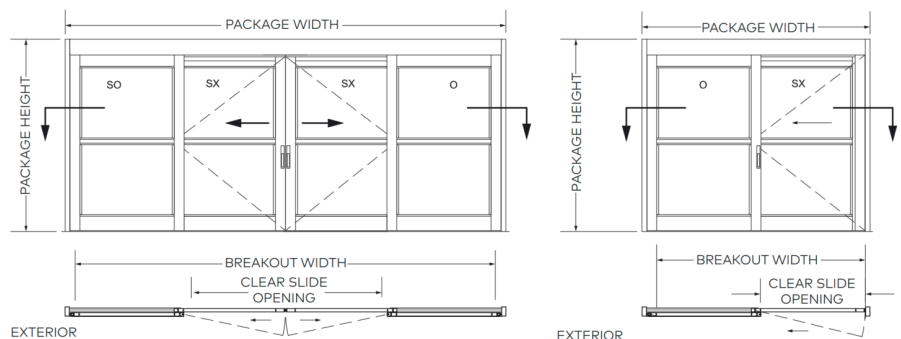

### Factsheet

# ICU200 Technical specification

Configuration	
<b>Standard finishes</b>	Clear or Dark Bronze Anodized
<b>Package height</b>	up to 9'-0" (108")
<b>Package width</b>	[Single slide up to 9'-0"] (108") [Bi-part slide up to 16'-0"] (192") [Single telescopic slide up to 12'-0"] (108") [Bi-part telescopic slide up to 18'-0"] (216")
<b>Door panels</b>	2-5/8" Narrow stile [Including 3/4" wide glass stop] 3-1/4" Muntin mounted at 41.75" [Including 3/4" wide glass stop] 4" Bottom rail [Including 3/4" wide Glass stop] 7" & 10" Bottom rails available
<b>Jamb tubes</b>	1-3/4" x 4-1/2" smooth or double pocket 2" x 6" option available

Safety and security	
<b>Lock</b>	Maximum security two-point mortise lock Electric Shutter Strike
<b>Remote monitoring</b>	Security contacts

Features	
<b>Threshold</b>	Surface mounted or recessed
<b>Weather stripping</b>	Brush or Santoprene rubber
<b>Glass stops</b>	1/4" to 1" In door panels

Bi-parting narrow stile	Minimum	Maximum
<b>Overall frame width</b>	8'-6"	16'
<b>Rough opening width</b>	8' - 6' 1/2"	16 1/2"
<b>Clear slide opening</b>	39 - 5/8"	84 - 5/8"
<b>Header height</b>	7'	9'
<b>Rough opening height</b>	7' - 1/4"	9' - 1/4"

Single slide narrow stile	Minimum	Maximum
<b>Overall frame width</b>	6' - 6"	9'
<b>Rough opening width</b>	6' - 6 1/2"	9' - 1/2"
<b>Clear slide opening</b>	32 - 7/16"	47 - 7/16"
<b>Header height</b>	7'	9'
<b>Rough opening height</b>	7' - 1/4"	9' - 1/4"

Bi-parting telescopic	Minimum	Maximum
<b>Overall frame width</b>	12' - 7"	18'
<b>Rough opening width</b>	13' - 1/2"	16' - 1/2"
<b>Clear slide opening</b>	83 - 13/16"	107 - 13/16"
<b>Header height</b>	7'	9'
<b>Rough opening height</b>	7' - 1/4"	9' - 1/4"

Single slide telescopic	Minimum	Maximum
<b>Overall frame width</b>	7'	12'
<b>Rough opening width</b>	7'-1/2"	12'-1/2"
<b>Clear slide opening</b>	44' - 9/16"	84 - 9/16"
<b>Header height</b>	7' 4"	9'
<b>Rough opening height</b>	7' - 4 1/2"	9' - 1/4"

## Standards of compliance

- 3. ICC/IBC - International Building Code
- 6. NFPA 101 - Life Safety Code

**Any questions? We would be happy to assist.**

Contact Customer Service at 800 523 8483 or [glassorders.us@dormakaba.com](mailto:glassorders.us@dormakaba.com)