

# Kaba Enclosure Locking Kabashield



## Application:

High quality guard for high security applications including remote sites within the utility and infrastructure sectors, security and access control for perimeter security, eliminating vulnerable padlock shackles; including security doors, vehicle and pedestrian gates.

## Specification:



- > 200 mm Galvanised steel body
- > 16 mm stainless steel locking bolt
- > Cylinder is protected by spinning guard
- > Cylinder faces down to prevent the ingress of water, dust and dirt
- > Optional additional drill protection
- > No obvious sign of attack
- > Successful history, tried and tested by various third parties

## Included with the cylinder:

- > 2 reversible keys (See "Special Functions and Keys" for key options)
- > Security Card for ownership registration and ordering duplicate keys

**Body length** 200 mm

**Clear width of shackle** 46 mm

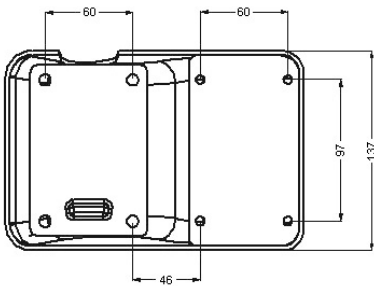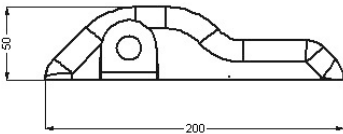

## Available systems:

- > Kaba 20
- > quattro pluS

Part number	Shackle Material	Left/ Right handed	Insert
K160050-NI	Galvanised Steel	Left	Kaba 20
K160120-NI	Galvanised Steel	Right	Kaba 20
7-380240-NI	Galvanised Steel	Left	quattro pluS
7-380230-NI	Galvanised Steel	Right	quattro pluS