

dormakaba KES900Z

Preload Electric Strike



Advantages at a glance

- Field reversible fail-safe or fail-secure
- Operating voltage 12VDC/24VDC
- Monitored latch and lock status
- Suits latch throw up to 18mm
- Preload – Up to 35kg (80lbs)
- Pre-drilled for optional lip extensions
- Includes mounting tabs for metal frame
- Zinc alloy construction (non fire-rated)
- Static holding force of 680kg (1500lbs)



Monitored Zinc Alloy

The KES900Z electric strike provides a pre-load function capable of opening electrically with up to 35kgs of pressure being applied, commonly caused by air conditioning, doors that have dropped or warped or the addition of door seals.

Due to the Zinc Alloy construction it is an economic solution, perfectly suited for non fire-rated applications

such as residential and aluminium fabricated solutions.

The KES900Z offers dual voltage of 12VDC/24VDC and includes convenient fail safe/fail secure function (changeable on site).


Also included are pre-drilled holes for optional lip extensions and installation tabs for metal frame.

Lip extensions are provided to meet the needs of a particular door jamb width.

Specifications

Dimensions	1745L x 44W x 27D(mm)
Holding force	680kg (1500lbs)
Preload	35kg (80lbs)
Voltage	12/24VDC
Voltage tolerance	+/- 15%
Current usage	600mA/12VDC, 300mA/24VDC
Operating temperature	-10°C ~ +49°C
Humidity	0-85% non-condensing
Operating mode	fail secure/fail secure
Cycle tested	1 million
Material	
Housing	zinc alloy
Keeper	stainless steel
Ordering details	
Article number	9400000012901

Dimensions

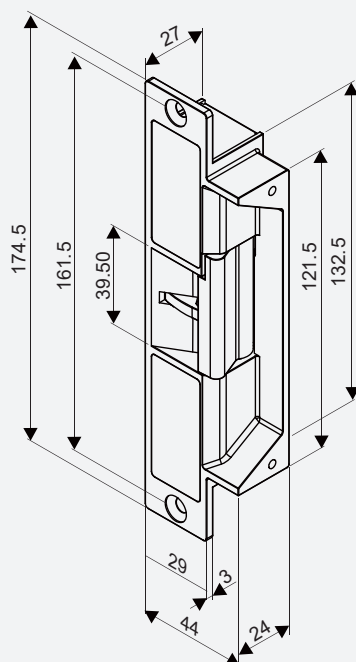


Changing fail-safe/fail-secure

Fail-safe or fail-secure operation is field reversible by changing the direction of the lug.


Fail-secure

(power to open)


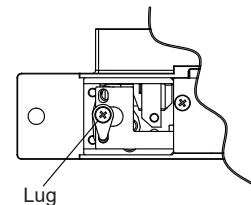


Fail-safe


(power to lock)

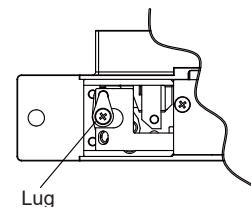

Optional accessories lip extensions

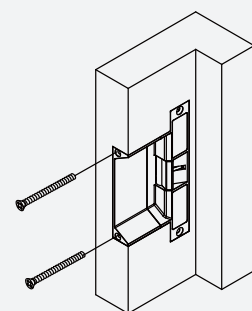

KESLP2225



KESLP2250

Any questions? We would be happy to advise you.

Contact us on: 1800 675 411