


NOTES:
 1- FOR DIMENSIONS AND TOLERANCES REFER TO CORRESPONDING DOOR PREPARATION DRAWING #IP-
 2- ALL DIMS ARE IN INCHES [millimeters]
 3- FOLDING LINES HIGH (H) AND LOW (L) FOR BEVEL EDGES SHOWN ARE FOR DOOR WITH 3° BEVEL ANGLE
 4- SYMBOLS: - ∇ DEEP
 - CL CENTER LINE OF DOOR
 - ∅ DIAMETER

HOLE ID	DIM INCH	DIM mm	COMMENTS
A	∅ 1/2	∅ 12,7	-
B	∅ 1	∅ 25,4	-
C	∅ 1/8	∅ 3,2	∇ 7/8 [22,2]
D	∅ 1/2	∅ 12,7	ONLY IF THUMB TURN
E	∇ 1	∇ 25,4	ONLY IF RH OR LHR
F	∇ 1	∇ 25,4	ONLY IF LH OR RHR
G	∅ 3/4	∅ 19,1	ONLY MODELS WITH WIRES THROUGH THE DOOR

UNLESS OTHERWISE NOTED, DRILL HALF DOOR THICKNESS ON BOTH SIDES.

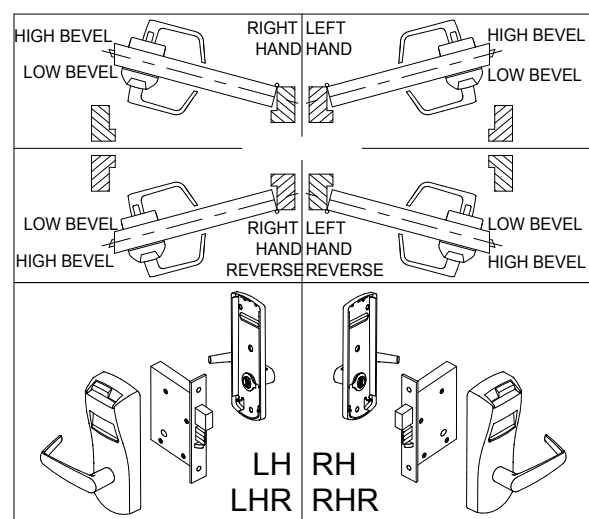

660, 660i, 760, 770, 790, 76, 79, E-PLEX 2000, POWER-PLEX 2000 & E-PLEX 7900 LOCK SERIES

DRILLING TEMPLATE
 MORTISE ASM 1-1/4" FACE PLATE



www.kabalodgingsupport.com

DO NOT REPRODUCE
 CONTACT CUSTOMER SUPPORT
 ILCO 1-877-468-3555
 SAFLOK 1-800-999-6213
 E-PLEX POWER-PLEX
 1-800-849-8324

SHEET 1 OF 1	DATE 20SE17	UNE VERSION FRANCAISE DE CE DOCUMENT EST DISPONIBLE SUR DEMANDE.	
	ECN 16312	DT-514985	REV-2