



## E-Plex 2000

### Standalone pushbutton lock

The E-Plex 2000 electronic pushbutton lock eliminates the problems and costs associated with issuing, controlling and collecting keys. The lock's traditional telephony style keypad and simple programming options provide convenient, cost efficient and durable access control.

The E-Plex 2000 lock verifies exterior access while allowing free egress. Locks are powered by three AA batteries that load into a slide-up battery tray in the outside housing; this eliminates any wiring requirement and allows for continuous operation of up to 100,000 cycles.

#### Advantages at a glance:

- 100 Users
- 1000 event audit trail
- Simple keypad programming & optional software
- Multiple operating modes; PIN, Passage and Lockout
- Battery powered with up to 100,000 cycles from 3 AA's
- Cylindrical latch or MS2 mortice locking options
- Key override cylinder with anti-bump.

# Specifications

## Features

User Parameters	Code length—adjustable to accept 4 to 8 digits Anti-tamper lockout—adjustable from 3 to 9 invalid attempts with an adjustable period of 0 to 90 seconds Re-lock time—adjustable from 2 to 20 seconds
Lock Power	Battery powered - batteries located in outside housing; offers quick and easy battery replacements (three AA Alkaline batteries provide up to 100,000 cycles); lock data is maintained if batteries fail

## Mechanical Features

Construction	Heavy-duty commercial Grade 1 lockset, solid cast exterior housing, solid cast levers, cylindrical drive wear tested for extensive use in indoor and outdoor applications
Numeric Keypad	Vandal resistant, solid metal pushbuttons
Backset	Cylindrical: 70 mm backset (standard) Cylindrical: 60 mm backset (optional) Mortice: 60 mm
Minimum Stile	127mm
Weight	Cylindrical and mortice models: 3.63 kg
Key Override	
Key-in-Lever Cylinder	Kaba 1539 6-pin bump resistant cylinder, Schlage "C" Keyway

## Installation


Ease of Installation	No wiring to or through the door—no risk of pinched wires
Door Preparation	Cylindrical - 54mm cylindrical drive hole with three additional through bore holes; wood or metal doors Mortice - MS2 door preparation with three additional through bore holes
Door Thickness	Cylindrical model: 35mm to 64mm, optional kit for up to 95mm. Mortice models: 35mm to 50mm. optional kit for up to 64mm.
Items Supplied Include	Cylindrical and mortice - lock assembly, installation manual, template, quick reference guide, operations manual, and required hardware
Fire Rating	2 hour
Durability	Designed and certified to the US standard of ANSI/BHMA Grade 1
Environmental	Indoor/outdoor approved; -35°C to 66°C

## Warranty

Warranty	2-year warranty from date of installation; built-in warranty counter in lock memory
----------	---

## Finishes


Available Finishes	Satin chrome housing and levers (standard) Special order options: satin brass or dark bronze
--------------------	---




Satin Chrome




Satin Brass



Dark Bronze




E2000 Exterior



E2000 Interior

## Locking Options

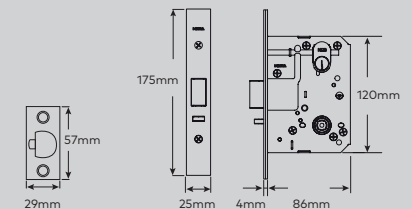

Cylindrical (standard)

MS2 Mortice version (optional)

## dormakaba Australia - Head Office

12-13 Dansu Ct  
3803 Hallam  
Australia  
T. 1800 675 411  
F. +61 (3) 8795 0280  
info.au@dormakaba.co  
http://www.dormakaba.com.au

## dormakaba New Zealand - Head Office

Building P 61-69 Patiki Road  
1026 Avondale/Auckland  
New Zealand  
T: 0800 436 762  
F: 09 830 2052  
E: info.nz@dormakaba.com  
http://www.dormakaba.co.nz