

Keyscan K-SLD510D

Duplex ID card and credential printer



Features and benefits:

- Use with Aurora Version 1.0.25 or later
- Single or Dual Sided Mid-Range Printer
- Print Speed: Max. 22 sec/card (YMCKO)
- 300dpi with Edge to Edge Printing
- 1D & 2D Barcode printing
- Low Cost Security with UV Printing
- Plug-in for supporting external devices
- Password verification with administrator and user authentications
- Data encryption over USB and SSL (secure socket layer) over Ethernet
- Ribbons and accessories available

Duplex ID Card Printers

The dormakaba dual sided, USB ID card and credential printer from IDP is an easy-to-use printer for small or mid-size organizations. It is fully compatible with Keyscan Aurora software and, together, can produce full-color or monochrome printed single or dual sided ID cards and/or customer branded access control credentials.

Its time-test design provides reliable and robust printing speeds, excellent image reproduction and cost savings. Plus, it offers a wide range of optional features including Ethernet, smartcard encoding, and ultra violet (UV) printing.

The Aurora software application offers simple tools for card design, or you can


upload pre-designed corporate templates directly into Aurora to allow the user to create a truly customized card within minutes.

Now small businesses can afford to produce their own ID cards and credentials.

Other Available Models



K-SLD310S Single-side Printer

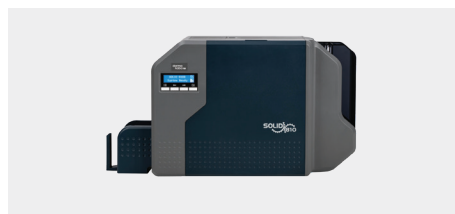

K-SLD810D Retransfer Duplex Printer

Specifications

Print Type	Dye-Sublimation
Print Area	Edge to Edge
Resolution	300dpi (Color & Mono), 600 & 1200dpi (Mono Only)
Dual Sided Printing	Option (with Flipper)
Monochrome Print Speed	5 sec./card (720 cards/hour)
Color (YMCKO) Print Speed	Max. 20 sec./card (180 cards/hour)
Memory	64MB RAM
Display	1 LED Button
Supported Platforms	Microsoft Windows 2000/2003/XP/Vista/7/8/10, Mac OS, Linux
Communication	USB, Ethernet (Option)
Power Supply	Free Voltage (AC100/200V, 50~60Hz)
Power Consumption	48W
Temperature/Humidity	15~35°C/35~70%
Card Feeding	Automatic
Card Size	ISO CR80 (54mm x 86mm/2.12" x 3.38")
Card Thickness	0.38mm (15mil), 0.76mm (30mil)
Card Type	PVC, PET, Composite PVC
Input Hopper	80 cards
Output Hopper	25 cards
Dimensions	6.8" x 14.8" x 7.5" (172 x 377 x 190mm) (WxLxH)
Weight	7.5lbs/3.4kg
Contact	ISO 7816 (ID-1)
Contactless	MIFARE, ISO 14443 (Type A/B), ISO 15693, DESFIRE, iCLASS
Security	Administrator and user passwords; PC authentication locks the printer to a specific PC to render it useless if stolen; Data Encryption over USB and SSL (secure socket layer) over ethernet
Warranty	3 years; 2 years for print heads
Certifications	CB; CE; FCC; KC (battery); C Tick
Ribbon Replacements	Single side; dual side; black only and color ribbons available. See Keyscan price book

© 2024 dormakaba Canada, Inc. Information on this sheet is intended for general use only.

Any questions? We would be happy to advise you.

Contact us at: 1-888-539-7226