



**SECTION 2**  
TYPE: O-SX-SX-O

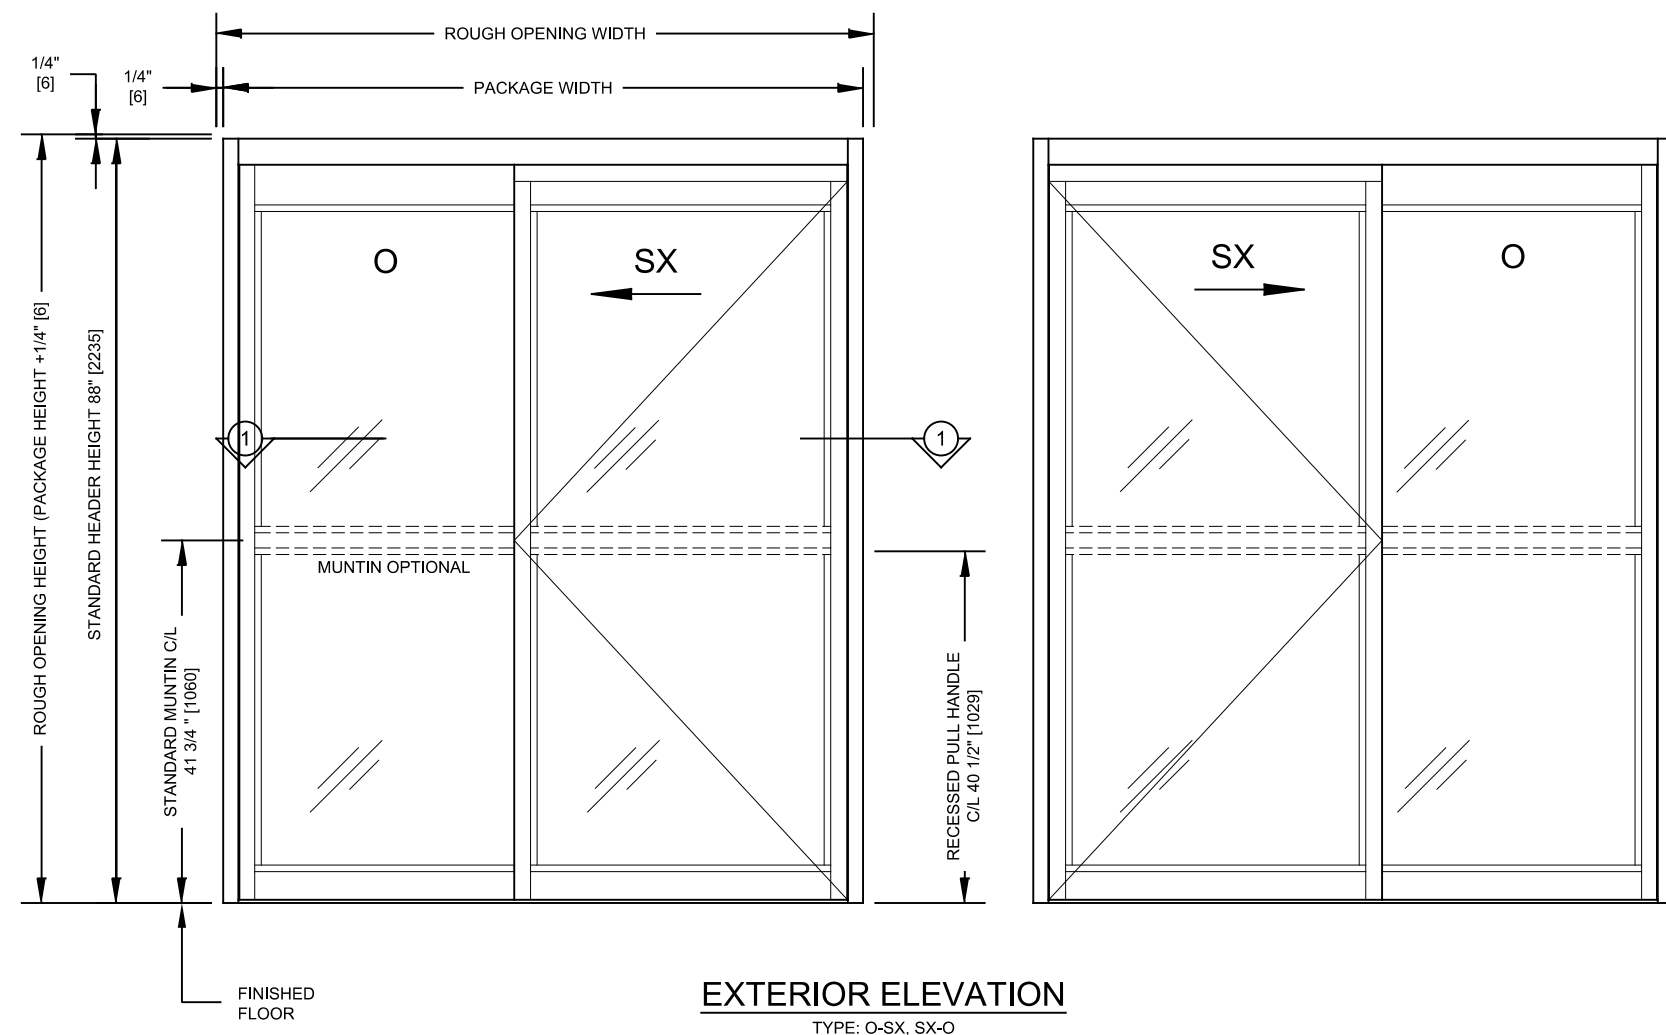

**EXTERIOR ELEVATION**  
TYPE: O-SX, SX-O

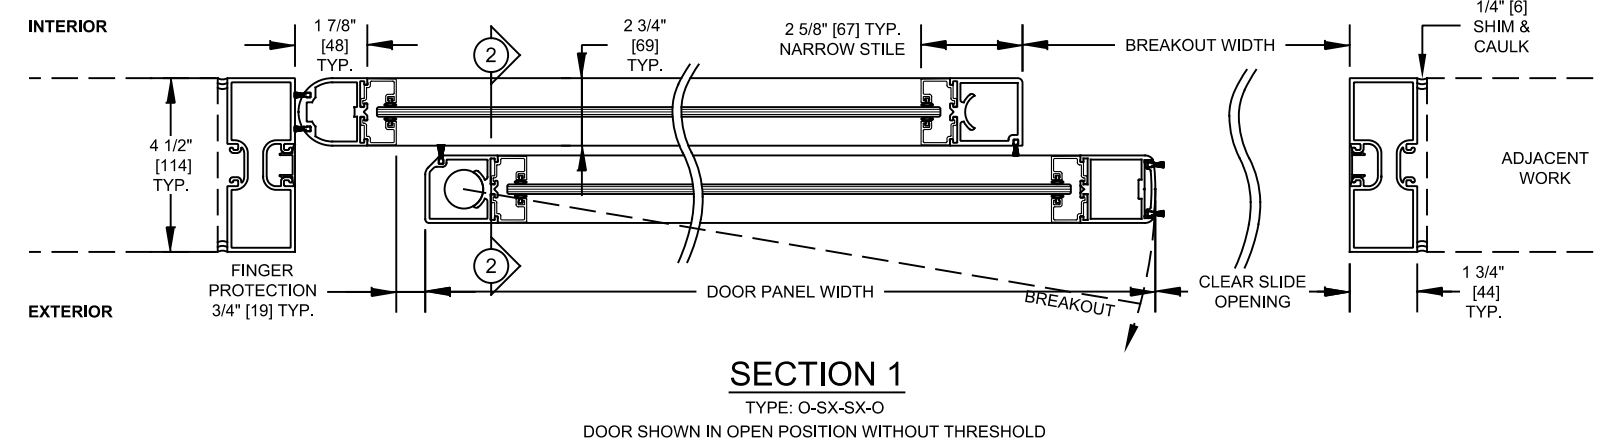

**SECTION 1**  
TYPE: O-SX-SX-O  
DOOR SHOWN IN OPEN POSITION WITHOUT THRESHOLD

Package Width	Rough Opening Width	Clear Slide Opening	Door Panel Width	Breakout Width
(6'-6") 78" [1981]	78 1/2" [1994]	32 7/16" [824]	38 1/2" [977]	36 1/16" [916]
(7'-0") 84" [2134]	84 1/2" [2146]	35 7/16" [900]	41 1/2" [1054]	39 1/16" [992]
(8'-0") 96" [2438]	96 1/2" [2451]	41 7/16" [1053]	47 1/2" [1207]	45 1/16" [1145]
(9'-0") 108" [2743]	108 1/2" [2756]	47 7/16" [1205]	53 1/2" [1359]	51 1/16" [1297]
Width Formulas	Package Width + 1/2" [13]	(Package Width / 2) - 6 9/16" [167]	(Package Width / 2) - 1/2" [13]	(Package Width / 2) - 2 15/16" [74]

- This Standard Single door package consists of:
  - Panels:
    - 2 5/8" [67] Narrow stile door panels (including 3/4" [19] wide glass stop).
    - 3-1/4" [83] Optional muntin mounted at 41-3/4" [1060] centerline on all panels (including 3/4" [19] wide glass stop).
    - 4" [102] Bottom rails (including 3/4" [19] wide glass stop).
    - 1 3/4" [44] x 4 1/2" [114] Double pocket jambs.
    - Vertical and horizontal brush type weather stripping (AAMA-701-11Class A).
    - Recessed pull handle on SX panel.
    - 3/4" [19] wide snap-in glass stops for glazing from 1/4" [6] to 1 1/4" [32] thick at 1/8" [3] increments.
    - ITS Hydraulic self-closer in SX panels.
    - Breakaway sliding door panels (SX) and fixed sidelights (O) panels.
  - Finishes:
    - Clear anodized (BHMA 204).
    - Dark Bronze anodized (BHMA 313).
- Typical Package Options:
  - Finishes: special anodized, PVDF (wet) paint, powder coat, and cladding available for header, panels and jambs.
  - Muntins: multiple muntins, various heights and locations.
  - Bottom Rails: 7" [178], 10" [254]. Other options available.
  - Santoprene rubber weather stripping available.
  - Locking and Security Options:
    - Manual two point mortise lock with thumb turn and key cylinder.
    - Security contacts.
  - Jambs: 1 3/4" [44] x 4 1/2" [114] and 2" [51] x 6" [152] smooth available.
- Dimensions:
  - Drawing dimensions are in English & Metric units. Metric units are displayed as: 1" [25] millimeters.
  - Typical package dimensions: (Glass thickness may be limited by panel size)
    - Each door package is manufactured to your custom size requirements.
    - Package Width: Min. 6'-6" [1981] to Max. 9' [1743].
    - Header Height: Min. 7' [2134] to Max. 9' [2743].
    - SX Panel Weight: Max. Weight 200 lbs [90kg].
- Standards of Compliance:
  - Designed to comply with these standards depending on installation and application:
    - International Building Code (Section 1008).
    - NFPA 101 Life Safety Code (Section 7.2.1.9).
  - Refer to Local, State, National or AHJ. Building Code for minimum door height and minimum/maximum width allowable for egress requirements.
  - Minimum ADA is 32" clear slide opening.
- Contact dormakaba Architectural Services for more information:
  - Phone: 1-844-SPEC-NOW (1-844-773-2669)