



Saffire LX-P & Saffire EVO LZ-P

HAGAR 4500 exit door preparation

NOTES

- FOR EXIT DEVICE AND MORTISE LOCK CUT-OUT REFER TO EXIT DEVICE MANUFACTURER INSTALLATION INSTRUCTIONS.
- 2. BACKSET SHOWN FOR REFERENCE ONLY, ADJUST BACKSET TO EXIT DEVICE MANUFACTURER INSTALLATION INSTRUCTIONS. BACKSET TO BE ADJUSTED TO LOW AND HIGH BEVEL DOOR EDGE AS PER BACKSET ADJUSTMENT TABLE.
- 3. DIMENSIONS ARE SYMETRICAL ABOUT & UNLESS OTHERWISE NOTED.
- 4. FOR SURFACE MOUNT VARIANTS PLEASE REFER TO IP-516418-15 FOR THE PLACEMENT OF HOLE 0.750" & CABLE GROOVE 0.250". HOLES 2x0.250" NOT REQUIRED.
- 5. GROOVE TO BE DONE ONLY IN SOLID DOORS. TO PASS WIRES INSIDE THE DOOR FOR HOLLOW DOORS.
- 6. REFER TO SPECIFIC TOLERANCES TABLE FOR DIMENSIONS MARKED WITH #.
- 7. DRAWING IS NOT TO SCALE.
- 8. DIMENSIONS ARE IN INCHES [mm].

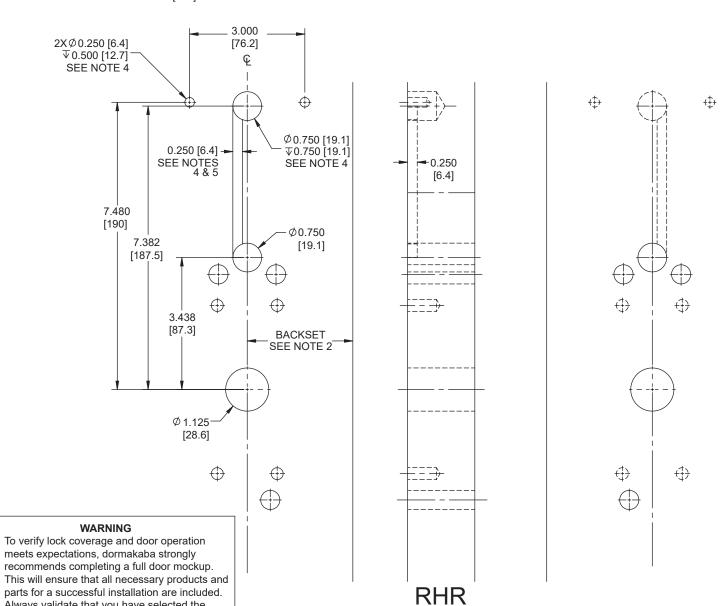




DIMENSIONS = IMPERIAL/IMPÉRIAL [MILLIMÈTER / MILLIMÈTRE] 3D FILE GOVERNS ALL UNSPECIFIED DIMENSIONS & GENERAL FOLERANCES APPLY / LES DIMENSIONS NON SPÉCIFIÉES SONT DÉFINIES PAR LE FICHIER 3D ET LES TOLÉRANCES GÉNÉRALES S'APPLIQUENT GENERAL TOLERANCE, UNLESS OTHERWISE SPECIFIED TOLÉRANCES GÉNÉRALES, SAUF SI SPÉCIFIÉ AUTREMENT


THREAD CLASS / FILET SAE: 2A-2B ISO: 6g / 6H

ANGLE: ±1°

CHAMFER / CHANFREIN: ∠±5°



05/2024

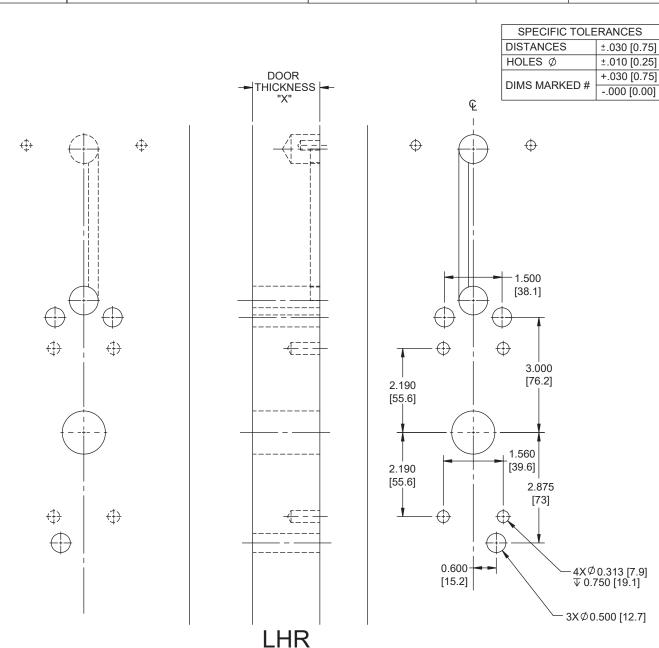

 Drawing is not to scale. Measurements are for reference only. Not a drilling template.

with different locking device options.

 If you have any questions, please contact your local sales representative or authorized reseller

Always validate that you have selected the correct template for specific lock model being installed. The same lock model can be offered