

I.AM SERIES Identity Access Management

Standalone Identity Access Management

AD102 Kit

OVERVIEW

The Standalone Identity Access Management (I.AM) Kit features all the security benefits of biometric access control, only in a simple, non-networked module that supports up to two entry points via a single reader. The data management and enrollment are handled with ease right at the required Fingerprint Key biometric reader without any PC connection.

By simply placing an enrolled finger at the Fingerprint Key, a user will gain authenticated access in less than one second without keys or access cards. For visitors, keypad PIN access can be granted. Plus, the Fingerprint Key is rated for indoor and outdoor use. Just like Kaba's online, networked systems, the applications are all embedded and require no software or servers. That makes installation easy with no certification necessary. Migration to Kaba's full Web-based solution is seamless.

ENDLESS APPLICATIONS

The Standalone I.AM Kit is the perfect solution for any residential or commercial application, including doors, gates, garages, warehouses, wine cellars, gun safes, jewelry cabinets, data rooms, remote sites and second properties. And it's not just for offices or homes but also schools, restaurants, banks, retail and healthcare facilities.

COMPATIBILITY

The Standalone I.AM Kit supports one required Fingerprint Key (Kaba I.AM) reader through RS485 communication.

Features

- Supported Fingerprint Key stores 50 user templates
- Sleek, compact reader (single-gang mount)
- Standalone, non-networked module; no PC needed
- Color: black
- IP65-listed reader
- Works with low-voltage power
- Scalable using existing reader
- Simple wiring, installation



Standalone Controller
(AD102)



Fingerprint Key
(AR402)

SPECIFICATIONS | CONTROLLER


ReaderFingerprint Key (Kaba I.AM), 1 maximum
Access Points.....2 (via 1 supported Fingerprint Key)
EventsNone (non-networked/offline module with embedded access software)
Mechanical.....Metal mount plate with screw-on cover (standard) // Rear, side cover access for cable connections
Mounts in standard third-party locking enclosures

Installation.....Environmentally controlled areas
PowerInput: 12 to 24 VDC (24 VDC recommended) // Load: 20 mA + current of connected reader 12 VDC
Dimensions.....4.7 x 4.7 x 1.5 in (120 x 120 x 40 mm) with enclosure
Packaged Weight1.59 lb (720 g): Standalone Identity Access Management Kit (fingerprint key and a controller)
Operating Temperature.....32 to 122 °F (0 to 50 °C)
Relative Humidity0 to 85%, non-condensing
Interface.....Readers: 1 x RS485 // 3 x input, 2 x output, 2 x relay // DC output (readers): 1 x 12-24 VDC

SPECIFICATIONS | READER

CredentialsFingerprint biometric, PIN
Templates50 user storage capacity
Search Modes1-to-many identification
Response/ReadsEnrollment <= 1 sec // Identification <= 1 sec // FAR & FRR = Adjustable
Fingerprint SensorThin optical sensor, 500 dpi @ 8-bit per pixel, .55 x .87 in (14 x 22 mm) active area
Mechanical.....IP65-listed, resin-sealed hard plastic enclosure, single-gang mount, metal mounting plate
Installation.....Indoor/outdoor
PowerInput: 12 to 24 VDC (24 VDC recommended) // Max.: 420 mA 12 VDC // Idle: 120 mA 12 VDC
Dimensions.....4.5 x 2.5 x 2 in (115 x 65 x 51 mm)
Operating Temperature.....14 to 122 °F (-10 to 50 °C); no direct sunlight
Relative Humidity0 to 95%, non-condensing

SYSTEM DIAGRAM

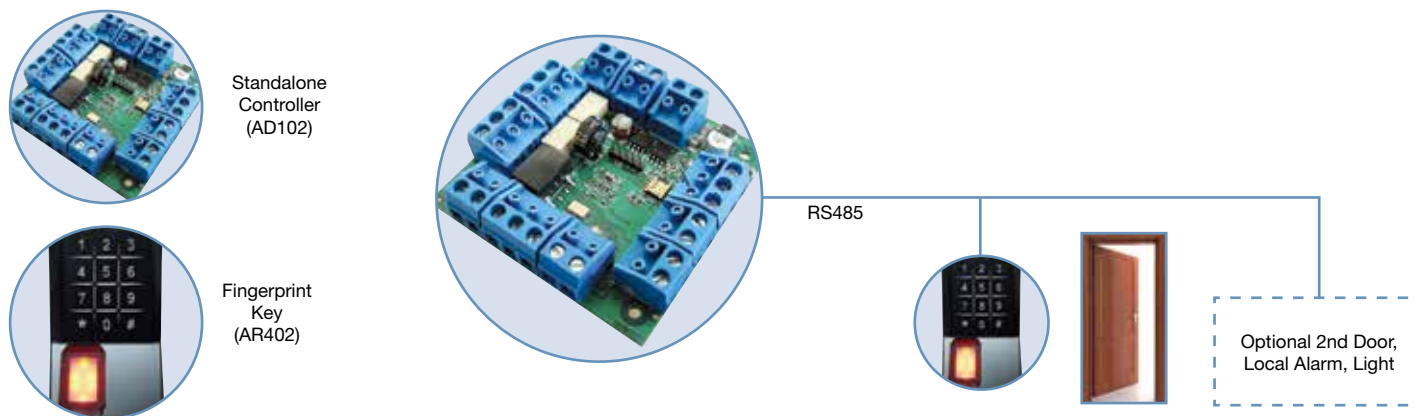

CERTIFICATIONS



environmentally
friendly



Disclaimer: While reasonable efforts were made to ensure the accuracy of this document at the time of printing, Kaba assumes no liability for any errors or omissions. This information is subject to be revised without notice, and changes may be incorporated in future releases.

Copyright © 2010-2013 Kaba ADS Americas. All rights reserved.

KAA1291 0413

Kaba Access & Data Systems Americas

2941 Indiana Ave
Winston-Salem, NC 27105
Tel: 1-800-849-8324

www.kaba-adsamericas.com

BEYOND SECURITY

