



**BTS 80 F**  
**- EMB**  
**- FLB**  
**- BSR**

Floor spring system

## Door closer system for single- and double-leaf doors

The door closer system BTS 80 perform its function discreetly yet still meet exacting convenience and safety criteria and is suitable for doors up to 300 kg.

The technique of floor spring is almost invisible placed in the ground.

The BTS 80 system with its 3 model variants BTS 80 F (Floor spring for fire and

smoke check doors), BTS 80 EMB (with electro-hydraulic hold open), BTS 80 FLB (with free-swing function) and the wide range of accessories allows effective adaptability to various door design and -functions. In conjunction with the door-coordinator BSR, a use at double-leaf doors is possible.



<b>Contents</b>	
	Page
<b>DORMA BTS 80 F-EMB-FLB-BSR</b>	
Features and functions	4
<hr/>	
<b>DORMA BSR</b>	
Door co-ordinator	6
<hr/>	
<b>DORMA BTS 80 System</b>	
Accessories	8
<hr/>	
<b>DORMA BTS 80 System</b>	
Range of equipment and optional accessories	9
<hr/>	
<b>DORMA BTS 80 System</b>	
Specification texts	10
<hr/>	

## Wide range of functions, concealed assembly, assured quality.

DORMA floor springs offer the perfect combination between freedom of creation and greatest reliability by their concealed floor mounting, providing a multitude of functions at the same time. Just as the requirements of preventive fire protection, the desire for barrier-free usage convenience and specific functions, like electrohydraulic hold-open

and free-swing, is fulfilled. Long-term engineering experience and a manufacture certified according to ISO 9001 give the certainty of an assured and high quality.

### Plus points

#### For the trade

- Complete range for every application.
- Simple stock holding thanks to identical accessories being used throughout the DORMA BTS range.

#### For the installer

- Easy to install.
- Interchangeable spindle inserts, available to suit site conditions.
- For doors up to 300 kg in weight.

#### For the architect/specifier


- Concealed installation.
- Range of functions to suit all applications.
- Proven, robust unit – for doors weighing up to 300 kg.
- All models tested and quality assured, and approved by the Institute for Building Technology, Berlin. For CERTIFIRE approvals see certificate no. 128 (BTS 80 F, EMB).

#### For the user

- Reliable and fail safe.
- Closing speed unaffected by changes in temperature.
- Easy door operation thanks to high mechanical efficiency.

Technical data		BTS 80 F	BTS 80 EMB	BTS 80 FLB
Closing force Size	Size EN			
Standard doors				
	up to 1100 mm	4	4	4
	up to 1250 mm	5	5	5
	up to 1400 mm	6	6	6
Fire and smoke check doors				
	up to 1100 mm	4	4	4
	up to 1250 mm	5	5	5
	up to 1400 mm	6	6	6
Handed model				
	LH (ISO 6)	•	•	•
	RH (ISO 5)	•	•	•
	Universal	•	•	–
Closing speed variable by valve adjustment		•	•	•
Latching action variable by valve adjustment		•	•	–
Backcheck, mechanical		•	•	–
Delayed action		–	–	–
Hold-open, electro-magnetic, Hold-open point selectable between 75 and 180°		–	•	–
Free swing 0–180°		–	–	•
Weight in kg		7,1	7,7	7,7
Dimensions in mm				
	Length	341	341	341
	Overall depth	78	78	78
	Height	60	60	60
Power input in W		–	2,3	2,3
Operating voltage in vDC ± 15%, residual ripple max. 30%		–	24	24
Rated for continuous duty		–	100	100
Door closer tested to EN 1154		•	•	•
Hold-open devices tested to EN 1155		–	•	•
CE marking for building products		•	•	•


• Yes – No ○ Option

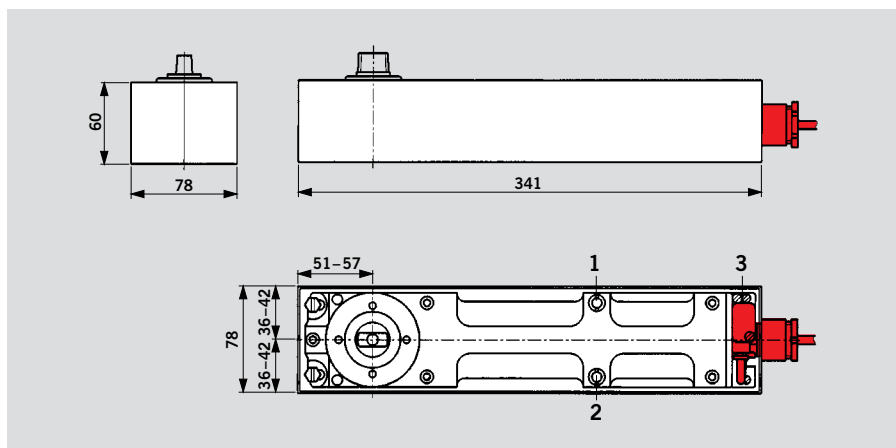

- 1 Closing speed adjustment valve
- 2 Latching speed adjustment valve (not available with the BTS 80 FLB)
- 3 Plug connector with cable for EMB and FLB power supply

### DORMA BTS 80 F

Floor spring



- 1 Fully controlled closing with adjustable speed
- 2 Adjustable latching action
- 3 Mechanical backcheck

Example shows LH (ISO 6) door; mirrored arrangement applies to RH (ISO 5) door.

DORMA BTS 80 F can be used on fire and smoke check doors. The doors must be especially designed for the use with the floor spring (distance to door hinge pivot 36 mm). An additional approval of suitability in connection with the particular fire and smoke check door is required. For the use on legally approved fire door assemblies, the regulations of the respective notice of approval must be complied with.

### F Approval certification


The DORMA BTS 80 F has been approved, and is subject to third-party verification, by the State Material Testing Agency (MPA), / Dortmund, Germany.



CERTIFIRE approved for fire doors; Cert. no. 128

### DORMA BTS 80 EMB

Floor spring with electromagnetic hold-open



- 1 Fully controlled closing with adjustable speed
- 2 Adjustable latching action
- 3 Mechanical backcheck
- 4 Hold-open range (fall back approx. 3°)

Example shows LH (ISO 6) door; mirrored arrangement applies to RH (ISO 5) door.

DORMA BTS 80 EMB can be used on fire and smoke check doors. The doors must be especially designed for the use with the floor spring (distance to door hinge pivot 36 mm). An additional approval of suitability in connection with the particular fire and smoke check door is required. For the use on legally approved fire door assemblies, the regulations of the respective notice of approval must be complied with.

### F Approval certification


The DORMA BTS 80 EMB has been approved by the Institute for Building Technology, Berlin, for use in combination with all common smoke detector systems. Acceptance inspection of the system is mandatory.



CERTIFIRE approved for fire doors; Cert. no. 128

### DORMA BTS 80 FLB

Floor spring with free-swing feature (electro-hydraulically controlled spring detent)



- 1 Free-swing range
- 2 Fully controlled closing in the event of an alarm or interruption of the power supply

Example shows LH (ISO 6) door; mirrored arrangement applies to RH (ISO 5) door.

DORMA BTS 80 FLB can be used on fire and smoke check doors. The doors must be especially designed for the use with the floor spring (distance to door hinge pivot 36 mm). An additional approval of suitability in connection with the particular fire and smoke check door is required. For the use on legally approved fire door assemblies, the regulations of the respective notice of approval must be complied with.

### F Approval certification

The DORMA BTS 80 FLB has been approved by the Institute for Building Technology, Berlin, for use in combination with all common smoke detector systems. Acceptance inspection of the system is mandatory.




CERTIFIRE approved for fire doors; Cert. no. 128

The DORMA BSR door co-ordinator ensures that, in **double doors**, the active leaf always closes after the inactive leaf.

In the case of doors with full emergency escape hardware, the inactive leaf must be equipped with a carry bar.

### F Approval certification


The DORMA BSR is approved in Germany for use in combination with double fire and smoke doors by the State Material Testing Authority, Dortmund. Further fire approvals exist or are pending in other countries. Additional approval certification of the relevant fire and smoke doors may be necessary.

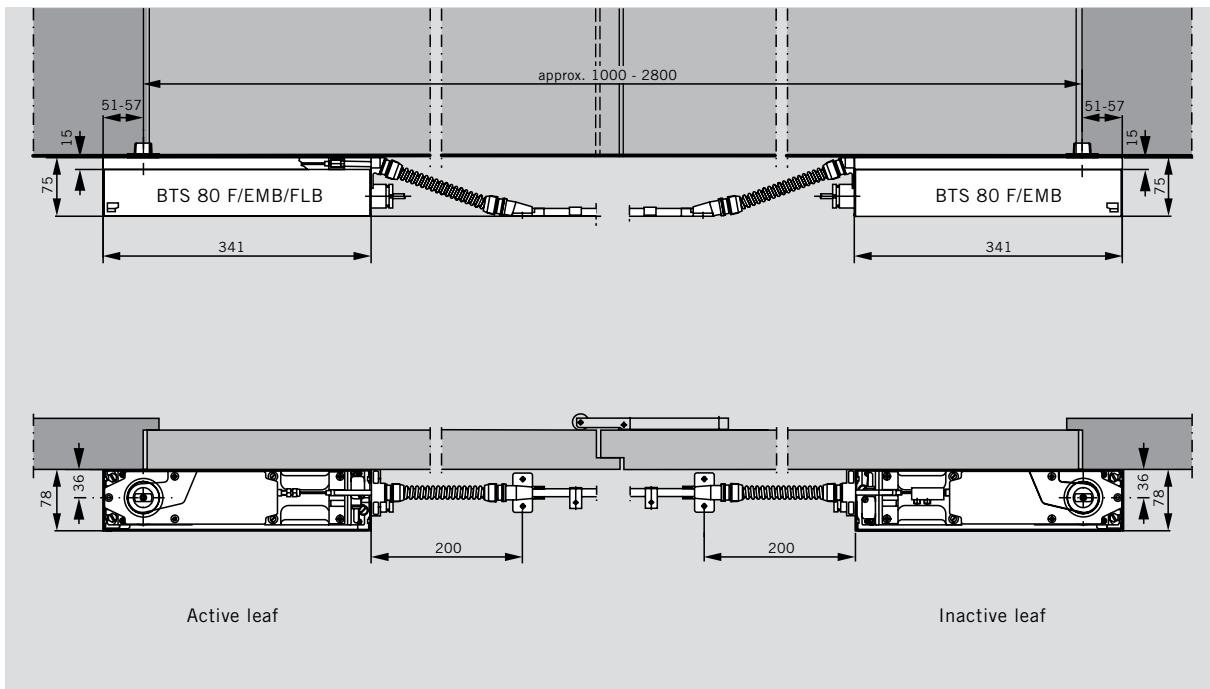

### DORMA BSR

The door co-ordinator operates independently of the hydraulics of the floor springs and consists of two mechanisms, one for the active and one for the inactive leaf, which are interconnected by a Bowden cable.


The DORMA BSR door co-ordinator is non-handed and is combined with DORMA BTS 80 F/EMB/FLB floor springs.

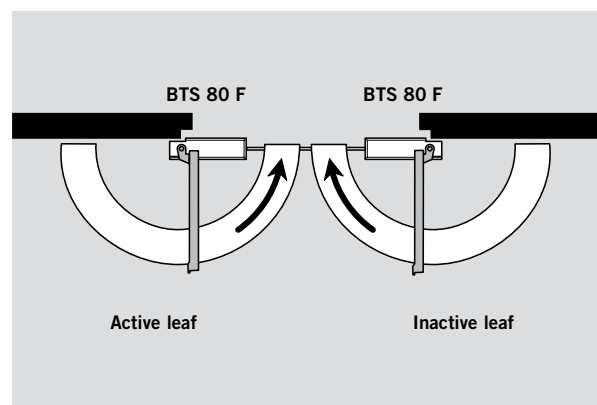

**DORMA BSR EMB 1**

With just one hold-open device for the inactive leaf, this door co-ordinator enables both door leaves to be held open. The inactive leaf can be held open at a point between approx. 75° and 180° (fall-back approx. 3°),


while the active leaf is held open by the door co-ordinator at any desired an

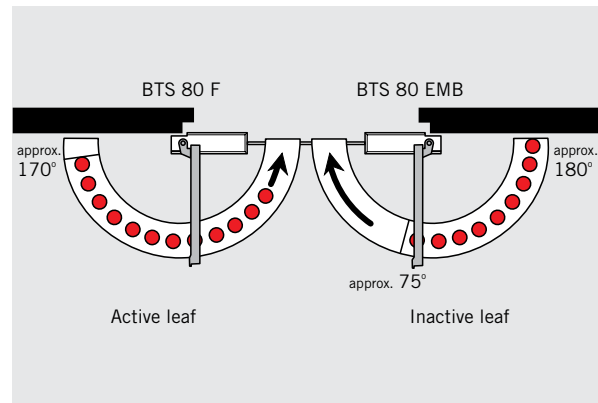

**DORMA BSR EMB 2**

With this door co-ordinator, the active leaf can be held open independently of the inactive leaf. The hold-open


points of both leaves lie between approx. 75° and 180° (fall-back approx. 3°).

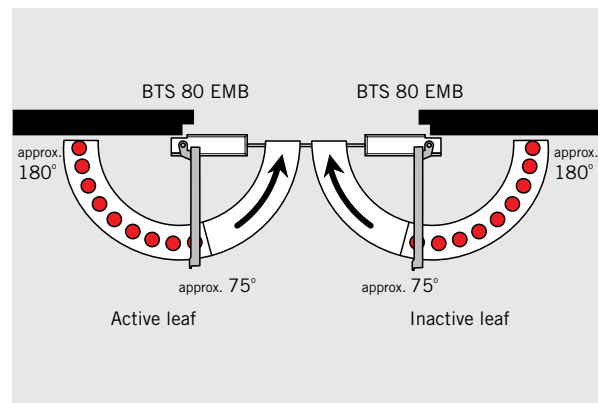

**DORMA BSR EMB 1 G**


With this door co-ordinator for special door designs incorporating, for example, fixed side panels, or a narrow inactive leaf in asymmetric double door sets, etc., the active leaf can be held open separately.

The hold-open point lies between approx. 75° and 180° (fall-back approx. 3°).

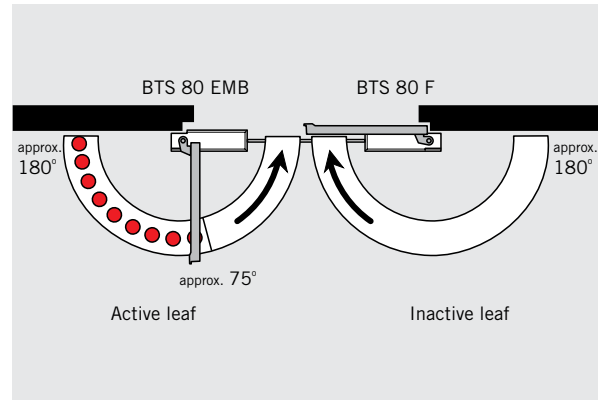


**DORMA BSR FLB 1 G**

This door co-ordinator with integral free-swung function for the active leaf can also be installed where the doors are to remain free-moving but must nevertheless close.

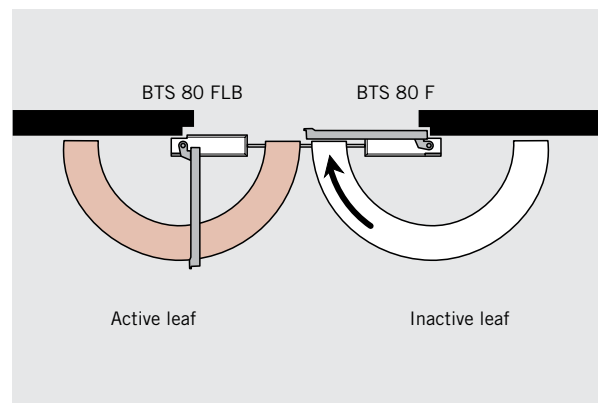

Application and Installation

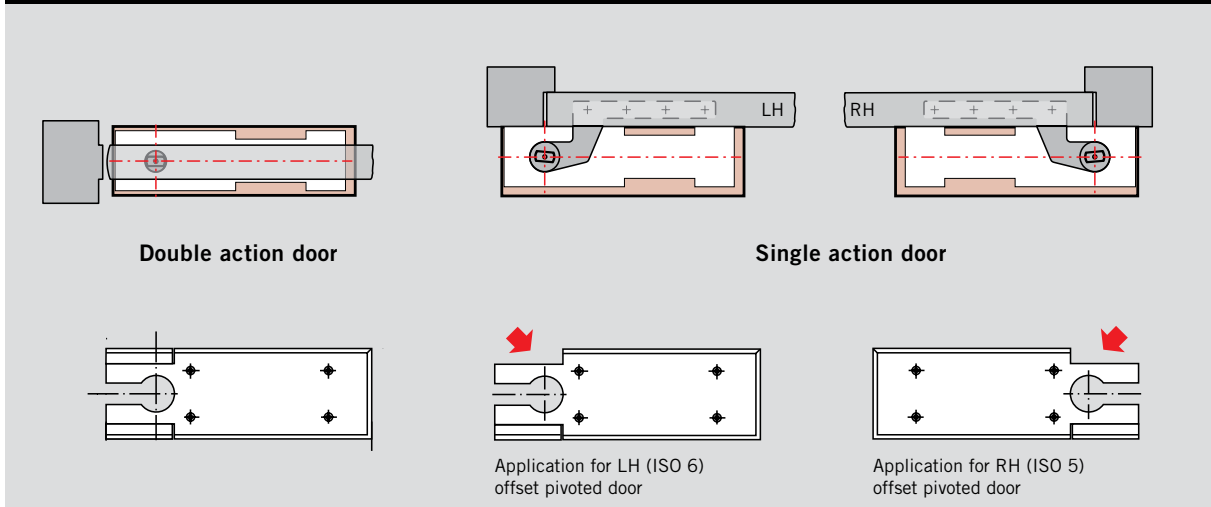


Accessories

**Universal cover plate**

Adaptable to right or left hand single action applications by simply snapping off the appropriate pre-blanked corner sections. For double action doors, the corner sections remain in place.

The universal cover plate is available in stainless steel or satin brass (material thickness 1.5 mm).

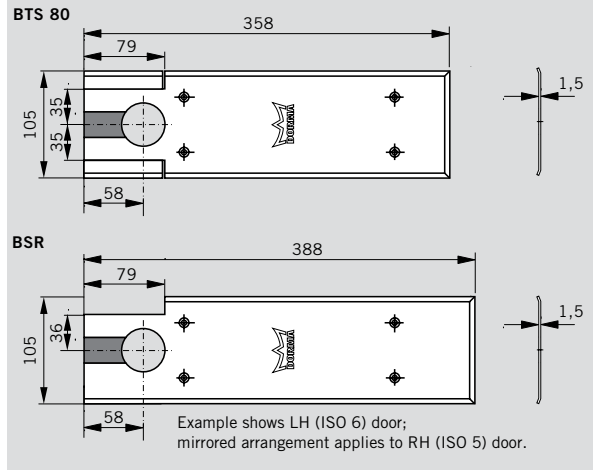

**Cover plate BSR**


The cover plate in the version for LH- or RH-doors is available in stainless steel

or satin brass (material thickness 1.5 mm).

**Spindles**

A range of interchangeable spindles is available to provide greater floor clearance if required (e.g. doors with thresholds, carpeted floors etc).

Special spindles available on application: e.g. with flat face profile and 3° offset or square section; spindles for non-DORMA-specific accessories are also available.

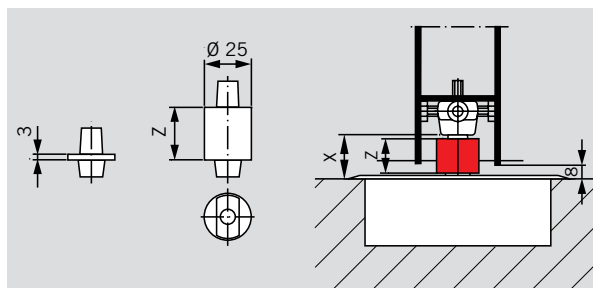





**DORMA 2300 sealing compound**

For filling cavities between the floor spring body and the cement box to protect against moisture penetration.

Information about other accessories such as **door straps and top centres** can be found in the "Accessories for DORMA BTS Floor Springs" leaflet.

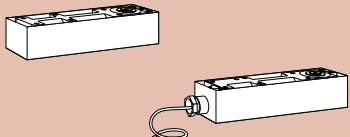

Standard equipment and accessories																
Floor spring BTS 80 F/EMB/FLB including cement box without spindle 			Spindles  Extension in mm Normal 5 7,5 10 12,5 15 20 25 28 30 35 40 45 50 												Sealing compound, 2300 	
			45200401	45200402	45200403	45200404	45200419	45200405	45200406	45200407	45200414	45200408	45200409	45200410	45200411	45200412

**BTS 80 F**

EN 4	LH (ISO 6)	80220101	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	RH (ISO 5)	80220201	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	Universal	80220001														
EN 5	LH (ISO 6)	80210101	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	RH (ISO 5)	80210201	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	Universal	80210001														
EN 6	LH (ISO 6)	80230101	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	RH (ISO 5)	80230201	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	Universal	80230001														


**BTS 80 EMB**

EN 4	LH (ISO 6)	82224101	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	RH (ISO 5)	82224201	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	Universal	82224001														
EN 5	LH (ISO 6)	82214101	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	RH (ISO 5)	82214201	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	Universal	82214001														
EN 6	LH (ISO 6)	82234101	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	RH (ISO 5)	82234201	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	Universal	82234001														

**BTS 80 FLB**






EN 4	LH (ISO 6)	82124101	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	RH (ISO 5)	82124201	#	#	#	#	#	#	#	#	#	#	#	#	#	#
EN 5	LH (ISO 6)	82114101	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	RH (ISO 5)	82114201	#	#	#	#	#	#	#	#	#	#	#	#	#	#
EN 6	LH (ISO 6)	82134101	#	#	#	#	#	#	#	#	#	#	#	#	#	#
	RH (ISO 5)	82134201	#	#	#	#	#	#	#	#	#	#	#	#	#	#

**Universal cover plate**

Stainless steel	46700000		#													
Satin brass	56700100															

# = Accessories

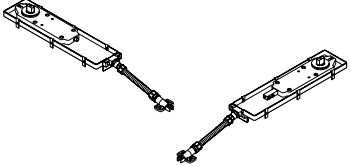**BSR**

Door co-ordinator BSR		Floor spring			Spindles			Cover Plates LH (ISO 6)	
					 Normal 5 25 Extension in mm 45200470 45200471 45200477			 Stainless steel 46700080 Satin brass 46700280	
								RH (ISO 5)  Stainless steel 46700081 Satin brass 46700281	
Variant	45700900	BTS 80 F	BTS 80 EMB	BTS 80 FLB	45200470	45200471	45200477		
BSR	1x	2x			#	#	#	#	
BSR-EMB 1	1x	1x	1x		2x	2x	2x	1x LH	
BSR-EMB 2	1x		2x					1x RH	
BSR-EMB 1 G	1x	1x	1x						
BSR-FLB 1 G	1x	1x		1x					

**DORMA BTS 80 F**

Floor spring to EN 1154, with CE mark, with fully hydraulic control of the closing action from 180°, adjustable latching action and backcheck. Including cement box.

**Size**

- EN 4
- EN 5
- EN 6

**Model**

- LH (ISO 6)
- RH (ISO 5)
- Universal

**Accessories**

- Universal cover plate (1.5 mm thick)
  - stainless steel
  - satin brass
- Spindle
  - standard
  - . . . mm extension
- Sealing compound

**Make:**

DORMA BTS 80 F

**DORMA BTS 80 EMB**

Floor spring to EN 1154, with CE mark, with electro-hydraulic hold-open, to EN 1155 and integrated pressure compensation for constant, adjustable, temperature-immune hold-open between door opening angles of approx. 75° and 180°. With adjustable closing speed under full hydraulic control, adjustable latching action and backcheck.

Including cement box. Operating voltage: 24vDC Power input: 2.3 W Approved by the German Institute for Building Technology, Berlin, for use in hold-open systems. Acceptance inspection of the system is mandatory.

**Size**

- EN 4
- EN 5
- EN 6

**Model**

- LH (ISO 6)
- RH (ISO 5)
- Universal

**Accessories**

- Universal cover plate (1.5 mm thick)
  - stainless steel
  - satin brass
- Spindle
  - standard
  - . . . mm extension
- Sealing compound

**Make:**

DORMA BTS 80 EMB

**DORMA BTS 80 FLB**

Floor spring to EN 1154, with CE mark, with electro-hydraulic free-swing function to EN 1155 between door opening angles of 0° and 180°, closer function (non-powered) effective from 180°, and with backcheck (non-powered). Including cement box.

Operating voltage: 24vDC Power input: 2.3 W Approved by the German Institute for Building Technology, Berlin, for use in hold-open systems. Acceptance inspection of the system is mandatory.

**Size**

- EN 4
- EN 5
- EN 6

**Model**

- LH (ISO 6)
- RH (ISO 5)

**Accessories**

- Universal cover plate (1.5 mm thick)
  - stainless steel
  - satin brass
- Spindle
  - standard
  - . . . mm extension
- Sealing compound

**Make:**

DORMA BTS 80 FLB

**DORMA BTS 80 BSR**

**DORMA BTS 80 BSR**  
 Floor spring to EN 1154, with CE mark, with fully hydraulic control of the closing action from 180°, adjustable latching action, backcheck and door co-ordination function conforming to EN 1158, operating independently of the closer hydraulics, comprising an active leaf and an inactive leaf mechanism intercon-

nected by a bowden cable. Including cement box, non-handed.

**Size**

- EN 4
- EN 5
- EN 6

**Accessories**

- Universal cover plate (1.5 mm thick)
  - stainless steel
  - satin brass
- Spindle
  - standard
  - . . . mm extension
- Sealing compound

**Make:**

DORMA BTS 80 BSR

### DORMA BTS 80 BSR-EMB 1

Floor spring to EN 1154, with CE mark, with electro-hydraulic hold-open to EN 1155 at the inactive leaf and integrated pressure compensation for constant, adjustable, temperature-immune hold-open between door opening angles of approx. 75° and 180°. With adjustable closing speed under full hydraulic control, adjustable latching action,

backcheck and door co-ordination function conforming to EN 1158, operating independently of the closer hydraulics, comprising an active leaf and an inactive leaf mechanism interconnected by a bowden cable. Including cement box, non-handed.

Operating voltage: 24vDC  
Power input: 2.3 W  
Approved by the German Institute for Building Technology, Berlin, for use in hold-open systems.  
Acceptance inspection of the system is mandatory.

#### Size

- EN 4
- EN 5
- EN 6

#### Accessories

- Cover plates (1.5 mm thick)
  - stainless steel
  - satin brass
- Spindle
  - standard
  - . . . mm extension
- Sealing compound

#### Make:

DORMA BTS 80 BSR-EMB 1

### DORMA BTS 80 BSR-EMB 2

Floor spring to EN 1154, with CE mark, with electro-hydraulic hold-open to EN 1155 at the inactive and active leaf and integrated pressure compensation for constant, adjustable, temperature-immune hold-open between door opening angles of approx. 75° and 180°. With adjustable closing speed under full hydraulic control, adjustable latching

action, backcheck and door co-ordination function conforming to EN 1158, operating independently of the closer hydraulics, comprising an active leaf and an inactive leaf mechanism interconnected by a bowden cable. Including cement box, non-handed.

Operating voltage: 24vDC  
Power input: 4.6 W  
Approved by the German Institute for Building Technology, Berlin, for use in hold-open systems.  
Acceptance inspection of the system is mandatory.

#### Size

- EN 4
- EN 5
- EN 6

#### Accessories

- Cover plates (1.5 mm thick)
  - stainless steel
  - satin brass
- Spindle
  - standard
  - . . . mm extension
- Sealing compound

#### Make:

DORMA BTS 80 BSR-EMB 2

### DORMA BTS 80 BSR-EMB 1G

Floor spring to EN 1154, with CE mark, with electro-hydraulic hold-open to EN 1155 at the active leaf and integrated pressure compensation for constant, adjustable, temperature-immune hold-open between door opening angles of approx. 75° and 180°. With adjustable closing speed under full hydraulic control, adjustable latching action,

backcheck and door co-ordination function conforming to EN 1158, operating independently of the closer hydraulics, comprising an active leaf and an inactive leaf mechanism interconnected by a bowden cable. Including cement box, non-handed.

Operating voltage: 24vDC  
Power input: 2.3 W  
Approved by the German Institute for Building Technology, Berlin, for use in hold-open systems.  
Acceptance inspection of the system is mandatory.

#### Size

- EN 4
- EN 5
- EN 6

#### Accessories

- Cover plates (1.5 mm thick)
  - stainless steel
  - satin brass
- Spindle
  - standard
  - . . . mm extension
- Sealing compound

#### Make:

DORMA BTS 80 BSR-EMB 1G

### DORMA BTS 80 BSR-FLB 1G

Floor spring to EN 1154, with CE mark, with electro-hydraulic free-swing function at the active leaf between door opening angles of approx. 0° and 180°, closer function (non-powered) effective from 180°, with backcheck (non-powered) and door co-ordination function conforming to EN 1158, operating independently of the closer

hydraulics, comprising an active leaf and an inactive leaf mechanism interconnected by a bowden cable. Including cement box, non-handed.

Operating voltage: 24vDC  
Power input: 2.3 W  
Approved by the German Institute for Building Technology, Berlin, for use in hold-open systems.  
Acceptance inspection of the system is mandatory.

#### Size

- EN 4
- EN 5
- EN 6

#### Accessories

- Cover plates (1.5 mm thick)
  - stainless steel
  - satin brass
- Spindle
  - standard
  - . . . mm extension
- Sealing compound


#### Make:

DORMA BTS 80 BSR-FLB 1G



[www.dorma.com](http://www.dorma.com)

WN 050 924 51532, 10/11, BTS 80 F-EMB-FLB, GB, X, DD, xx/11 - Subject to change without notice



4 10212261286722

DORMA GmbH + Co. KG  
DORMA Platz 1  
D-58256 Ennepetal  
Phone +49 2333 793-0  
Fax +49 2333 793-4950