

# MUTO

## Premium telescopic



### Expand openings with MUTO Premium telescopic.

Telescopic works with single or bi-parting door panels and provides wider openings when space is limited. Like all MUTO systems, Telescopic can be wall, ceiling, or glass mounted and comes with a range of optional features to ease operation and increase convenience.

Requiring limited glass prep\*, MUTO Premium Telescopic offers user-friendly installation, with ceiling, wall, or glass mounted options. Post installation, you can make quick and hassle-free height adjustments from the front. DORMOTION is easy to retrofit—the mechanism clamps directly to the door panel.

\*Minimal glass prep required with a single panel when using moving floor guides.




### Benefits include:

- Suitable for monolithic glass, tempered laminated glass, and wood doors.
- Supports door weights up to 176 lb (80 kg) per door panel.
- Synchronized panel movement.
- Easy to install and adjust.
- Unparalleled design in multiple finishes; choose from aluminum, similar to satin stainless, custom anodized, or over 200 custom RAL colors.

### Options

- Moving floor guides
  - With or without handle
  - Sidelites
  - Single or bi-parting doors (2-panel and 4-panel)
  - DORMOTION damping mechanism (DORMA SoftClose®)
  - Door position status indicator
- The easy MUTO Telescopic ordering process makes it simple to specify numerous solutions for single or bi-parting door systems, with or without sidelites.

## MUTO Premium telescopic

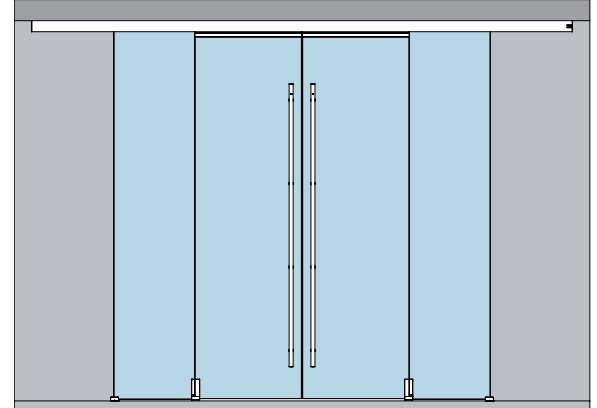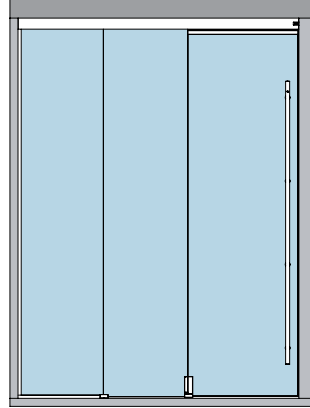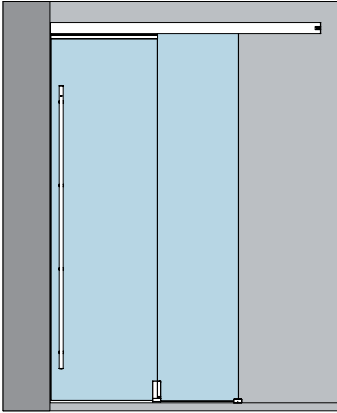

### Door widths

Without DORMOTION

- Without handle:  
23-5/8"–47-1/4" (600–1200)  
(for both quick mover and slow mover panels)
- With handle:  
26-1/8"–49-3/4" (664–1264)  
(for slow mover panel)

With DORMOTION

- Without handle:  
31-1/8"–47-1/4" (791–1200)  
(for both quick mover and slow mover panels)
- With handle:  
33-5/8"–49-3/4" (854–1264)  
(for quick mover panel)  
28-1/2"–44-5/8" (724–1133)  
(for slow mover panel)

Note: Width measurements are shown as inches followed by millimeters; for example, 1" (25).

### Specifications

<b>Max weight capacity (2 panels)</b>	330 lb (150 kg)
<b>Height adjustment</b>	+ /– 3/16" (5)
<b>Door height</b>	118" (3000)
<b>Tempered laminated/monolithic glass</b>	Yes
<b>Glass thickness</b>	5/16"–1/2" (8–12)
<b>Wood door thickness</b>	Up to 1-31/32" (50)
<b>Standard finishes</b>	150 Satin aluminum 113 Similar to satin stainless

### Standard options

Mount	Direction	Panels	Sidelite	Ref. Number
Ceiling	Left	2	●	836.704
	Right			836.706
	Bi-parting	4		836.711
	Left	–		836.703
	Right			836.705
Wall	Left	2	–	836.701
	Right			836.702
	Bi-parting	4		836.709
Glass	Left	2	●	836.707
	Right			836.708
	Bi-parting	4		836.712

● yes — no

© dormakaba 2024 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

**Any questions? We would be happy to advise you.**

Contact us at: 1-800-265-6630