

INSTALLATION




3903 AUDIBLE ALERT

Push Buttons

Instructions

1. Slide the colored leads onto the switch terminals (shown below).

NOTE: 'N' version is compatible with 1-3/4" (44.4mm) (or larger) narrow-frame profiles. Specifications are subject to change without notice.

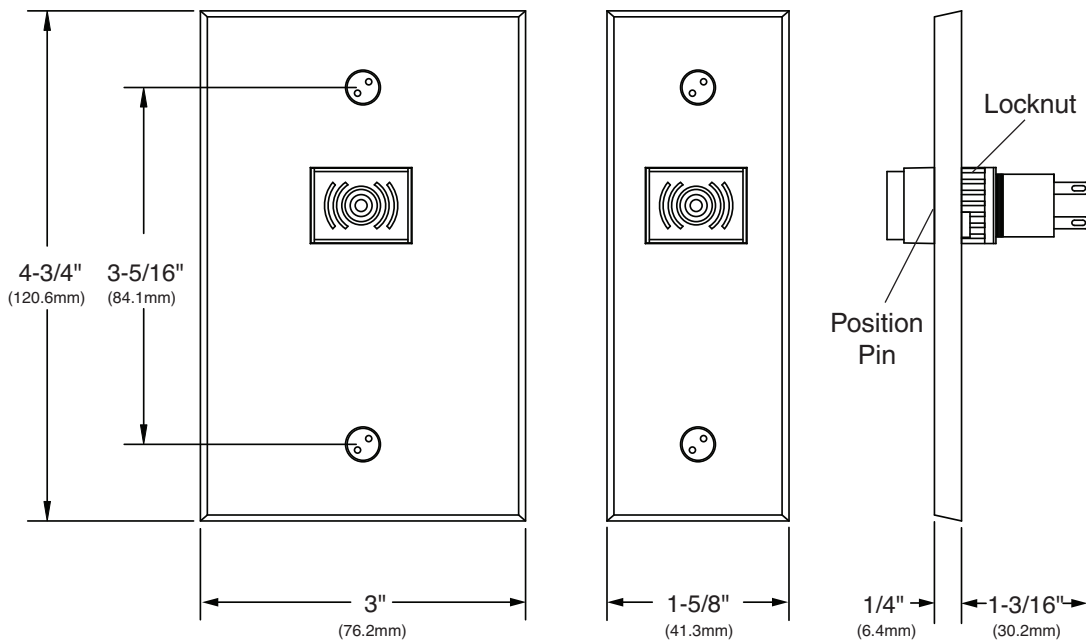

Voltage: 10 to 26VDC

Current Consumption: 30mA

Sound Pressure Level: 80-96dB @ 0.1m

Tone Frequency: 2.0 kHz

For Intermittent Tone

Positive (+) on A terminal; Negative (-) on B terminal

For Constant Tone

Positive (+) on B terminal; Negative (-) on A terminal