


NOTES:  
 1- FOR DIMENSIONS AND TOLERANCES REFER TO CORRESPONDING DOOR PREPARATION DRAWING #IP-  
 2- ALL DIMS ARE IN INCHES [millimeters]  
 3- FOLDING LINES HIGH (H) AND LOW (L) FOR BEVEL EDGES SHOWN ARE FOR DOOR WITH 3° BEVEL ANGLE  
 4- SYMBOLS: - ∇ DEEP  
 - C CENTER LINE OF DOOR  
 - Ø DIAMETER

HOLE ID	DIM INCH	DIM mm	COMMENTS
A	Ø 1/2	Ø 12,7	-
B	Ø 1	Ø 25,4	-
C	Ø 1/8	Ø 3,2	∇ 7/8 [22,2]
D	Ø 1/4	Ø 6,4	∇ 1/4 [6,4]
E	Ø 3/4	Ø 19,1	ONLY MODELS WITH WIRES THROUGH THE DOOR
F	Ø 1/2	Ø 12,7	ONLY IF THUMB TURN
G	∇ 13/16	∇ 20,7	ONLY IF RH OR LHR
K	∇ 13/16	∇ 20,7	ONLY IF LH OR RHR

UNLESS OTHERWISE NOTED, DRILL HALF DOOR THICKNESS ON BOTH SIDES.

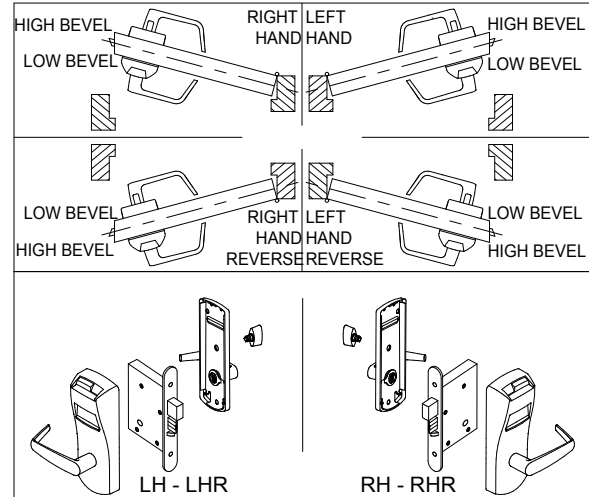

660, 660i, 760, 770, 790, 76, 79, E-PLEX 2000 AND POWER-PLEX 2000 LOCK SERIES

DRILLING TEMPLATE MORTISE ESM - 20mm FACE PLATE



www.kabalodgingsupport.com

DO NOT REPRODUCE  
 CONTACT CUSTOMER SUPPORT  
 ILCO 1-877-468-3555  
 SAFLOK 1-800-999-6213  
 E-PLEX POWER-PLEX 1-800-849-8324

SHEET 1 OF 1	DATE 10SE15	UNE VERSION FRANCAISE DE CE DOCUMENT EST DISPONIBLE SUR DEMANDE.	
	ECN 15518	DT-514987	REV-1