

FOR WOOD SCREWS PROVIDED USE 5/32" DRILL TWO (2) HOLES IN DOOR

(300)

€ OF DOOR

FOR 1/4-20 MACHINE SCREWS USE No.7 DRILL & TAP

NOTES:

- 1. DO NOT SCALE DRAWING.
- 2. DIMENSIONS ARE IN $\frac{\text{INCHES}}{\text{(MM)}}$.

TRACK

- 3. RIGHT HAND DOOR SHOWN.
- 4. MAXIMUM OPENING 90°.
- 5. SPINDLE No. 74003 SHOWN, FOR APPLICATIONS WITH THRESHOLDS USE SPINDLE 74012 AND ADD 1/2" TO VERTICAL DIMENSIONS NOTED.

(25)

- 6. FOR DOORS HUNG ON DORMA 75520/75523, DOROMATIC 91105/91105F OR RIXSON 519 POCKET PIVOTS.
- 7. MINIMUM POCKET DEPTH 4-1/2".
- 8. SPECIAL SIZE SELECTOR CHART FOR THIS APPLICATION.


BTS 80		BTS 75V	
CLOSER SIZE	MAX. DOOR WIDTH	CLOSER SIZE	MAX. DOOR WIDTH
1	NA	1	NA
2	3'-0"	2	2'-6"
3	4'-0"	3	3'-0"
		4	3'-6"

INTERIOR DOORS ONLY.

FLOOR CLOSER MODEL: BTS 75V/P, 80/P WITH 7451N SLIDE ARM ASSEMBLY POCKET PIVOT APPLICATION (PULL SIDE MOUNT)
TRACK MORTISED INTO DOOR
RECOMMENDED FOR NON FIRE RATED DOORS



DORMA Architectural Hardware Reamstown, PA 17567

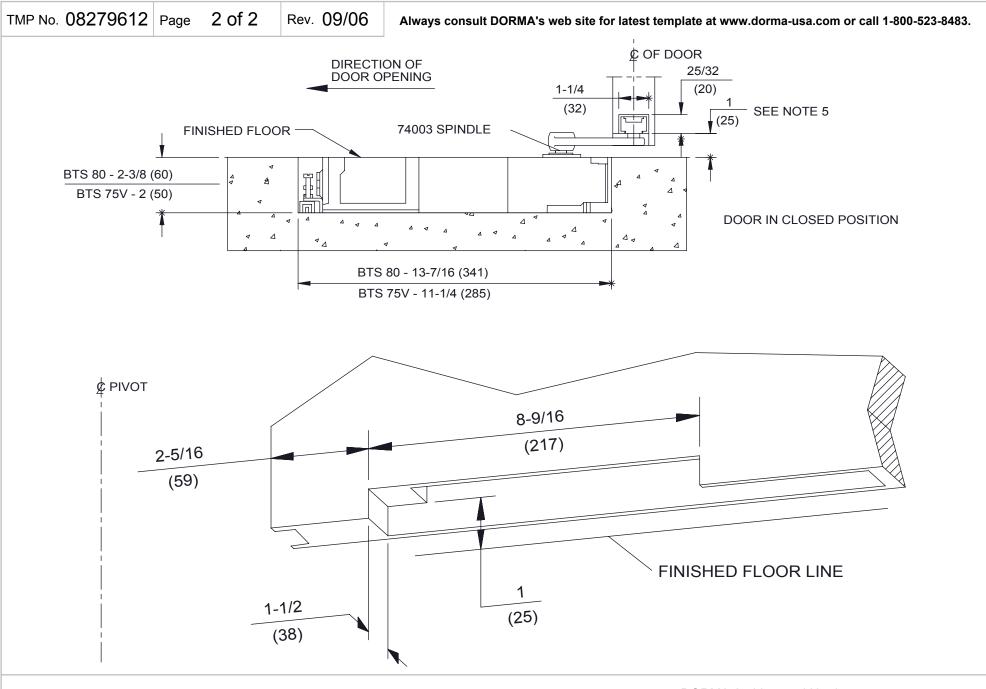



DORMA Architectural Hardware Reamstown, PA 17567