

Saffire LX-P & Saffire EVO LZ-P


DETEX V40 exit door preparation


NOTES

- FOR EXIT DEVICE AND MORTISE LOCK CUT-OUT REFER TO EXIT DEVICE MANUFACTURER INSTALLATION INSTRUCTIONS.
- 2. BACKSET SHOWN FOR REFERENCE ONLY, ADJUST BACKSET TO EXIT DEVICE MANUFACTURER INSTALLATION INSTRUCTIONS. BACKSET TO BE ADJUSTED TO LOW AND HIGH BEVEL DOOR EDGE AS PER BACKSET ADJUSTMENT TABLE.
- 3. DIMENSIONS ARE SYMETRICAL ABOUT & UNLESS OTHERWISE NOTED.
- 4. GROOVE TO BE DONE ONLY IN SOLID DOORS. TO PASS WIRES INSIDE THE DOOR FOR HOLLOW DOORS.
- 5. REFER TO SPECIFIC TOLERANCES TABLE FOR DIMENSIONS MARKED WITH #.
- 6. DRAWING IS NOT TO SCALE.

reference only. Not a drilling template. If you have any questions, please contact your local sales representative or authorized reseller

7. DIMENSIONS ARE IN INCHES [mm]

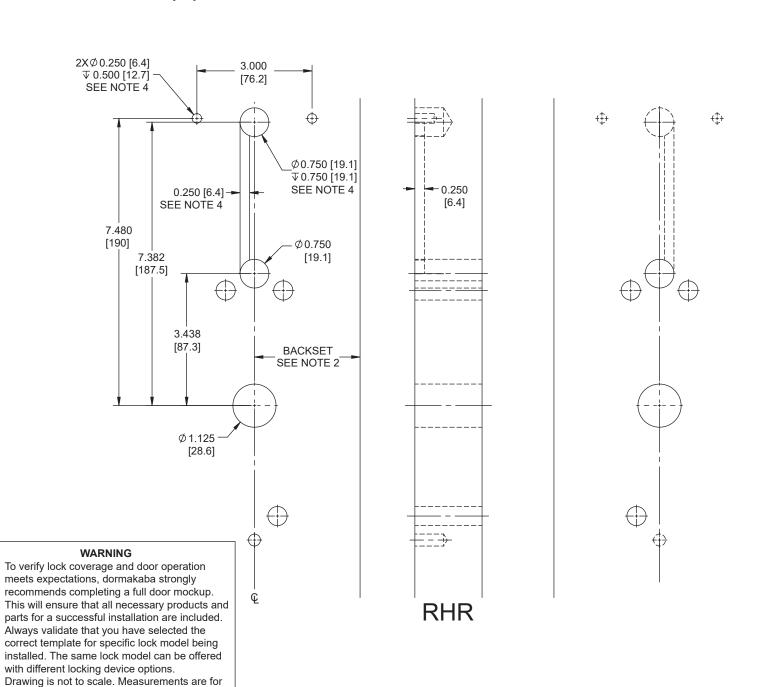

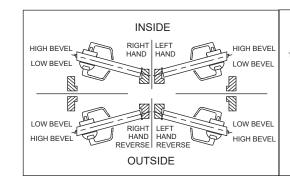

DIMENSIONS = IMPERIAL/IMPÉRIAL [MILLIMETER / MILLIMÈTRE]

3D FILE GOVERNS ALL UNSPECIFIED DIMENSIONS & GENERAL
TOLERANCES APPLY / LES DIMENSIONS NON SPÉCIFIÉES SONT DÉFINIES
PAR LE FICHIER 3D ET LES TOLÉRANCES GÉNÉRALES S'APPLIQUENT
GENERAL TOLERANCE, UNLESS OTHERWISE SPECIFIED
TOLÉRANCES GÉNÉRALES, SAUF SI SPÉCIFIÉ AUTREMENT

THREAD CLASS / FILET
SAE: 2A-2B ISO: 6g / 6H

ANGLE: ±1°

CHAMFER / CHANFREIN: ±5°

