

Activation and presence sensor

Automatic sliding doors



Features & benefits

- Ten microwave activation sensitivity settings and three infrared safety immunity settings.
- Ability to distinguish between approaching and departing traffic.
- Two 24-spot, high-density, infrared safety curtains providing precise presence detection.
- Four visible red alignment spots are projected on the ground to assist in precise IR curtain adjustment.
- Intelligent programming and troubleshooting via a menu-driven LCD.
- Fully monitored internally, capable of external monitoring.

Description

This dual technology product is a highly flexible and user-friendly solution for automatic sliding doors, industrial doors, vehicle gate detection, and off-door automation.

Can be adjusted into an ANSI compliant solution and has earned a comprehensive list of credentials and certifications, including UL, FCC and IP54.

Ensures convenience, safety and energy efficiency for all customers and end users.

Related products



DX3336-012
Dual technology sensor

DX3336-061
Dual technology sensor with video

DX3336-021
Mounting bracket adapter

DX3336-025
Rain accessory

DX3336-023
Spacer

DX3336-024
Flush mount ceiling adapter


DX3336-033
BEA Universal remote control

Technical specifications

Technology	Microwave doppler radar	Active infrared
Detection mode	Motion	Presence
Transmitter frequency	24.150 GHz	N/A
Transmitter radiated power	< 20 dBm EIRP	N/A
Transmitter power density	< 5 mW / cm ²	N/A
Spot size	N/A	2" x 2"
Max. number of spots	N/A	24 per curtain
Max. number of curtains	N/A	2
Output	Electro-mechanical-relay (potential & polarity free)	Solid-state-relay (potential & polarity free)
Max contact voltage	30 VDC	42 VDC
Max contact current	1 A	400 mA
Hold time	0.5 – 9 s	0.3 – 1 s
Test input	N/A	Sensitivity: Low < 1 V; High > 10 V (max. 30 V) Response time on test request: typical < 5 ms

Supply voltage	12 – 24 VAC ±10%; 12 – 30 VDC ±10% (to be operated from SELV compatible power supplies only)
Power consumption	< 2.5 W
Mounting height	78"–138" (6.5'–11.5')
Temperature range	-13 °F – 131 °F 0 – 95% relative humidity, non-condensing
Degree of protection	IP54

DX3336-012 dimensional drawing

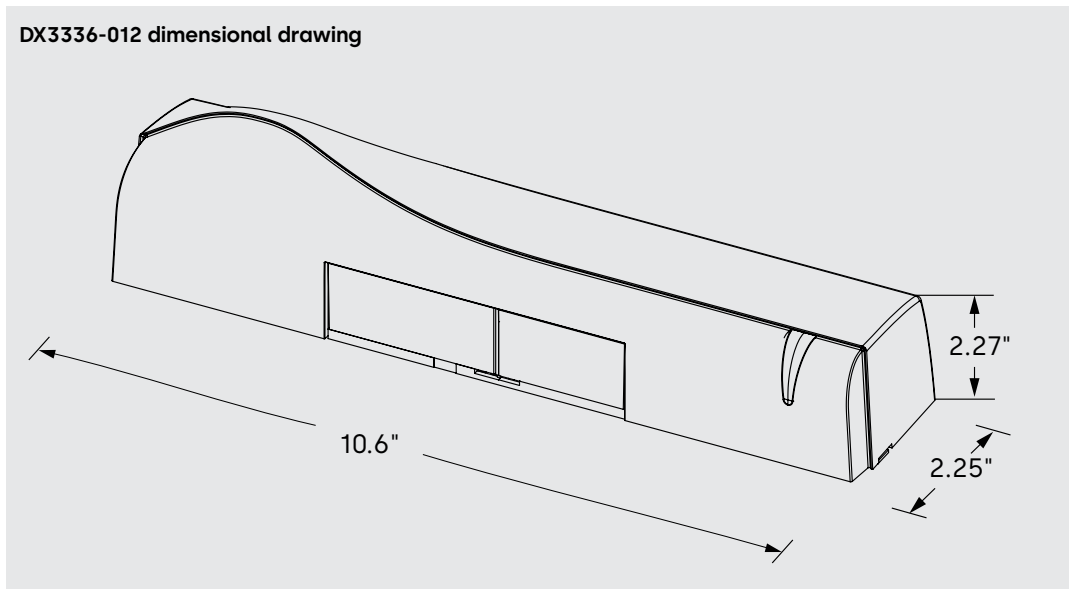

© dormakaba 2024 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

Any questions? We would be happy to advise you.
Contact us at: 1-800-265-6630