


HSW-FT

Horizontal Sliding Glass Walls

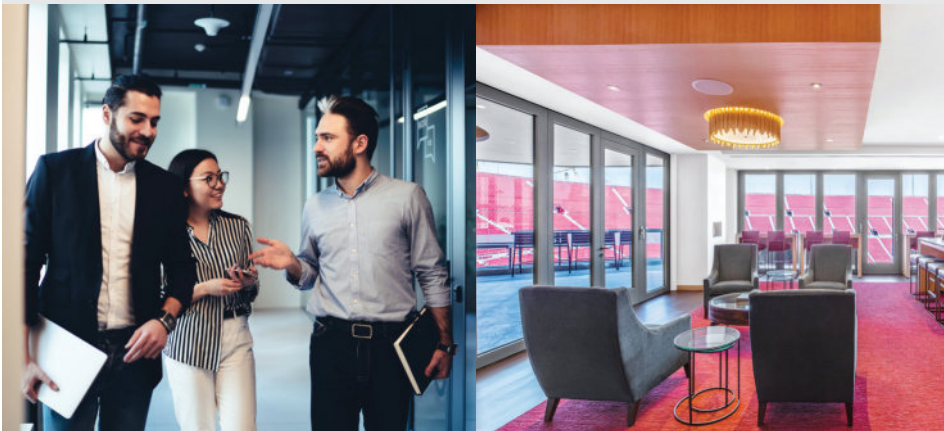

How You Benefit:

- Energy efficient thermally broken system for interior and exterior applications
- Hassle-free operation and panel conversion
- Convertible panel w/ fully integrated concealed door closer
- Thermally broken threshold options
- Straight and curved (segmented) track layouts
- Panel height up to 137"

Achieve seamless room division with exceptional thermal separation with HSW-FT, the thermally broken horizontal sliding wall system for interior and exterior spaces.

Flexible design, uncompromising performance:

The HSW-FT offers unmatched versatility. It's fully framed design offers high acoustical rating, and strong thermal protection. With virtually unlimited stacking possibilities, you can effortlessly create or expand rooms as needed. The convertible panels with built in closers are transformed from sliding panels to swing doors with a simple turn of the wrist.



A simple lock bar for switching from the sliding to the door function of convertible panels

Unparalleled Freedom:
Large-scale panels meet flexible design solutions




First panel as a sliding panel for a bypass system
Sliding panels as bypass panels with multi-point locking system

Sliding panel
Sliding panel without additional functions.

Convertible panel
Sliding panels with door function. Effortless switchover between the sliding and pivot door functions by means of a lock bar.

Fixed panel
Non-sliding panel with the same frame design as sliding panels.

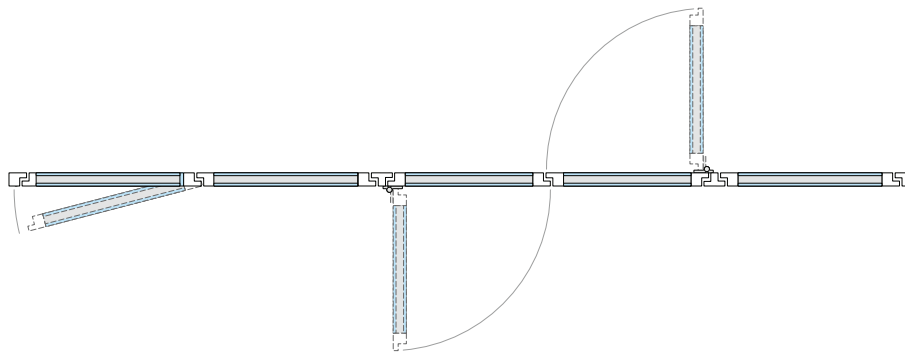

Panel specs

Max panel width	49"
Max panel height	Sliding panel: 137" Convertible panel: 118"
Max panel weight including glass	Sliding panel: 330lbs
Glass sizes	Standard Monolithic: 3/8", 1/2", 5/8", 3/4" Laminated Glass: 9/16", 11/16", 13/16", 1" IGU: 5/8", 1", 1 1/8", 1 3/16", 1 1/4", 1 3/8", 1 1/2" Triple Insulated IGU: 1 3/4", 1 7/8"

Any questions? We would be happy to advise you.

Contact us at: 800.523.8483