


790

Electronic hotel lock

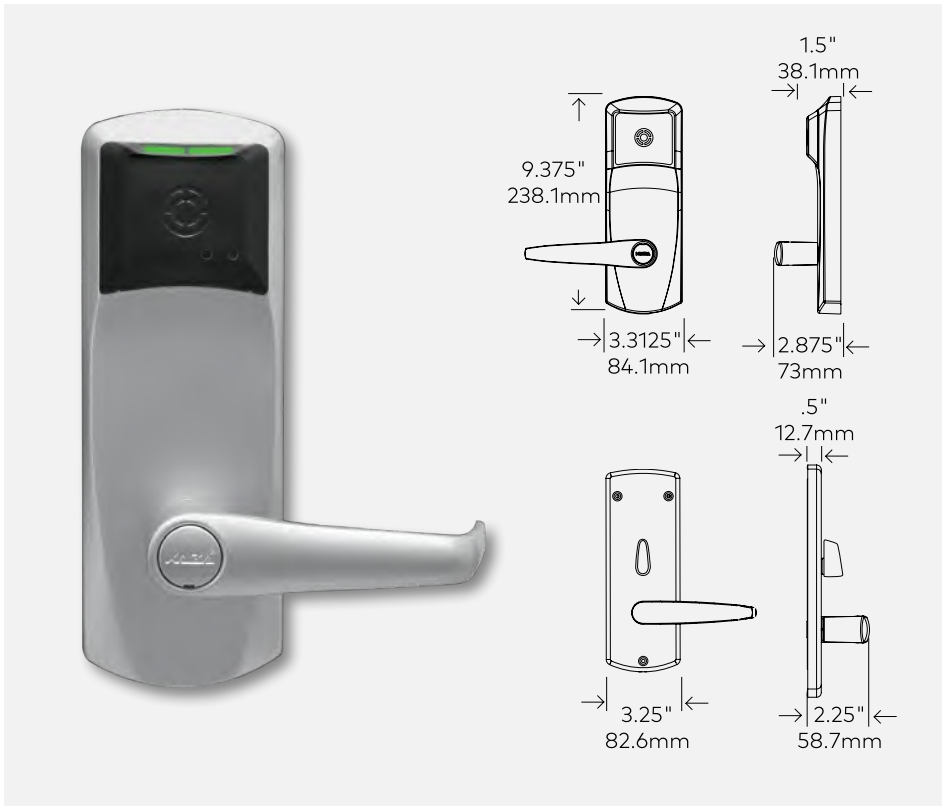

Features

- Operates with a completely sealed contactless reader
- Batteries last up to 2 years
- Low battery indicator alerts staff
- Lock programming and audit are not erased during battery replacement
- Wear resistant construction and finish
- Upgradable lock firmware

Overview

The 790 door lock offers RFID technology to enhance guest convenience and improve operational efficiency. This RFID solution offers keycard auditing capabilities for enhanced staff monitoring & user accountability. The 790 works with both the dormakaba access management software and a portable device.

Applications

- Suitable for small to very large scale hotels
- Easily replaces existing mechanical or electronic door locks
- Access control for guest rooms, common areas, and back-of-house

Security features

- High security and tamperproof design
- 1" solid deadbolt (optional auto deadbolt)
- Emergency access: Emergency keycard, mechanical key





Access management system

The 790 lock is supported by dormakaba's stand alone Front Desk Unit (FDU).

Upgrade path to mobile access

The 790 can be upgraded to a Bluetooth® Low Energy (BLE) enabled lock by only replacing the outside trim. The lock then becomes a RT Plus lock, working with dormakaba Ambiance Access Management Software.

Mechanical features

Description	Heavy duty electronic lockset with clutch mechanism and built-in contactless RFID reader (mortise or cylindrical)			
Handing	Left or right factory handed mortise, field reversible handing (lever and mortise)			
Levers	ADA compliant, outside lever free to rotate upward and downward in locked mode. Lever clearance (space from end of lever to door):			
	Long lever:	3/8" (9.5mm)		
	Short lever:	2" (51mm)		
	Elevon & Gala lever:	2" (58mm)	Gala	Elevon
Standard finishes	Satin chrome, satin brass and ultra finish for ocean front applications			
Concealed key override (optional)	KIK Core (keyed-alike, master keyed, recodable) Best small IC adaptor			
Deadbolt	1" (25 mm) (for ASM mortise) or 2 1.4 mm (for ESM mortise) solid metal, projected by inside thumbturn and retracted with the latch by the interior handle, emergency override or specific staff keycards. Optional auto deadbolt available			
Door thickness	From 1-3/4" to 2-1/2" (35mm to 66mm)			
Shipping weight	8.5 lbs (3.8 kg)			
Housing construction	Cast zinc alloy (outside housing levers and thumbturn), stainless steel inside housing			
Standard backset	2-3/4" (70mm) backset, 2-3/8" (60mm) backset also available for cylindrical lock			
Locking options	ANSI lock case with 1 1/4" or 1" lock front mortise. Optional automatic deadbolt Cylindrical latch (2-3/8" or 2-3/4" backset) European lock case mortise [20 x 165 mm] with round (20 or 23 x 235 mm) or square (20 x 235 mm) lock front mortise			

Batteries

Alkaline	3 AA batteries for up to 120,000 openings or up to 2 years (based on 10 openings per day). Low battery indicator: alerts staff that batteries need to be changed soon
----------	---

Lock operation

Date/time stamp	Real time: date and hours/minutes
Programming and audit trail downloading	Can be done using a 4K audit keycard or by using dormakaba M-Unit or FDU
Pre-registered keycards	Up to 10 days in advance
Keycard expiration	From 1 hour to 7 years, depending on type and setup
Passage mode	Set by authorized keycard
Lockout mode	Set by authorized keycard
Credentials	Supports MIFARE Ultralight C and MIFARE Plus* EV2 credentials *MIFARE Plus EV2: When used in enhanced security mode available in Ambiance v2.10+
Feedback	"Dual sensory" audible and visible indicators
Diagnostics	Built-in battery voltage meter and lock version display
Audit memory	Last 2000 transactions stored in lock (lock audit can be retrieved using M-unit or FDU or using lock audit keycard)
Disability feature	Extended unlock time (4 seconds standard, 15 seconds for disability)
Privacy override	Default emergency keycard only (user selectable)
Shabbat option	Orderable lock option with a mechanical key override (MKO) and no electronic sensors for: MKO, privacy, lever handle, or door ajar

Certifications & testing

Accessibility standard	Complies with 2010 ADA Standards for Accessible Design – Art. 309.4 (Operable Parts). Only for models with long lever with ASM or cylindrical lock. Non ADA compliant with auto dead bolt. Lock shall be properly aligned with the mortise or latch and must be installed strictly according to the dormakaba installation instructions and the ADA Standards and Regulations applicable for each facility, to be able to fulfill compliance with ADA requirements.
BHMA/ANSI	Certified to be compliant with Grade One performance tests for "ANSI/BHMA A156.13 Standard for Mortise Locks and Latches," and "ANSI/BHMA A156.25 Standard for Electrified Locking Devices." (Only locks tested and approved by non-biased third-party test lab are allowed in the "BHMA Certified Products Directory" found at www.buildershardware.com)
Fire rating	Listed for pre-prepared manufactured doors and certified for retrofitting on existing doors by Underwriters Laboratories for use on fire doors having up to a three-hour rating. U.L. Certification: "Accessories for Single-point Locks and Latches and Fire Exit Hardware." Evaluated in accordance with UL 10B and UL 10C. U.L. Listing: "Electrically Controlled Single-point Locks and Latches." Evaluated in accordance with UL 10B and UL 10C. Also classified in accordance with Uniform Building Code Standard 7-2, "Fire Test of Door Assemblies" (1997)
Electronics	FCC Part 15 Class A and Complies with CE Radio Equipment Directive 2014/53/EU
Environmental operating conditions	-31°F to 151°F (-35°C to 66°C) 0% to 85% non-condensing humidity at 86°F (30°C)

Warranty

Standard factory	Two years
Support programs	dormakaba Service Plans (Platinum, Gold, Silver)

© dormakaba 2024 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

Any questions? We would be happy to advise you.

Contact us at: 1.800.999.6213