


# P6062 CEN 4 Padlock

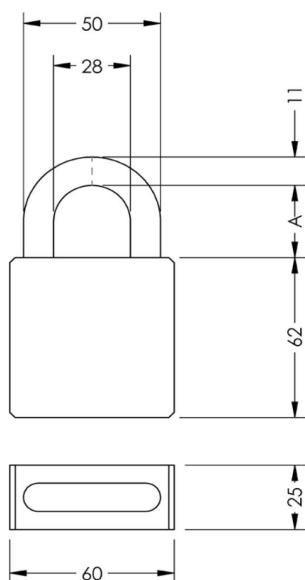

A= 28 or 50 mm

## Application:

High security applications including remote sites within the utility and infrastructure sectors as well as general perimeter security and security on track side/road side enclosures and cabinets.

A key is required to open and lock the shackle.

Suitable for universal indoor and outdoor use.

## Features:

- 60 mm case- hardened steel padlock and shackle
- Chrome plated
- 11 mm diameter open shackle
- Shackles available with 28 & 50 mm clearance
- EN 12320 Grade 4 (CEN4)
- Double locking hardened stainless steel ball bearing
- Uses a Swedish oval cylinder
- LPCB approved (LPS 1654: Issue 1 SR2) with Key Systems pextra (+), expert (plus), Quattro plus (+) and Kaba 20
- Padlock Retention chain available

## Available systems:

- Kaba 20
- quattro plus
- expert & expert plus
- pextra & pextra+