

INSTALLATION

RCI 909 SURFACE AND FLUSH MOUNT ROCKER SWITCHES

909 SURFACE MOUNT INSTRUCTIONS

1. Remove decorative bezel around switch.

Optional: * To convert the **momentary** switch provided to **maintained** switch mode, carefully remove the spring located under the rocker switch with a small screwdriver or pliers.

2. Mount switch base in desired location.
3. Connect wires under appropriate terminals (Fig. 1).
4. Replace decorative bezel.

909 FLUSH MOUNT INSTRUCTIONS

1. Pry off decorative bezel around switch and remove toggle.
2. Cut a 2-1/4" x 1-1/4" hole in the drywall.
3. Connect wires under appropriate terminals (Fig. 2).
4. Insert switch into hole. Tighten the two metal slot screws, until switch is secure.
5. Replace toggle and decorative bezel.

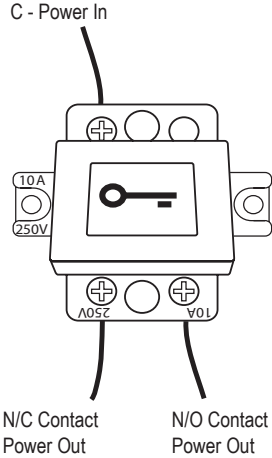


Fig. 1

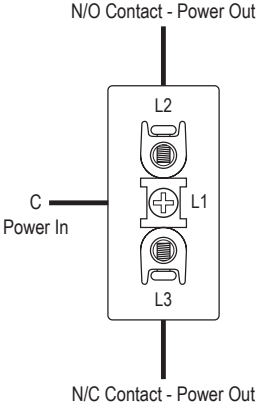


Fig. 2

Switch Mode	Switch Configuration	Switch Rating	Standard Finish
Momentary Action *	SPDT N/O or N/C	10A @250V	Beige (plastic)

NOTE: Specifications are subject to change without notice.

N/C - Normally Closed, N/O - Normally Open, C - Common

* Surface mounted switches **only** may be converted to Maintained Switch Mode.