

# Interior Glass Systems

## MUTO Premium Telescopic

### Expand openings with MUTO Premium Telescopic.

Telescopic works with single or bi-parting door panels and provides wider openings when space is limited. Like all MUTO systems, Telescopic can be wall, ceiling, or glass mounted and comes with a range of optional features to ease operation and increase convenience.

Benefits include:

- Suitable for monolithic glass, tempered laminated glass, and wood doors.
- Supports door weights up to 176 lb (80 kg) per door panel.
- Synchronized panel movement.
- Easy to install and adjust.
- Unparalleled design in multiple finishes; choose from aluminum, similar to satin stainless, custom anodized, or over 200 custom RAL colors.


Requiring limited glass prep\*, MUTO Premium Telescopic offers user-friendly installation, with ceiling, wall, or glass mounted options. Post installation, you can make quick and hassle-free height adjustments from the front. DORMOTION is easy to retrofit—the mechanism clamps directly to the door panel.

\*Minimal glass prep required with a single panel when using moving floor guides.

#### Specifications

Max weight capacity (2 panels)	330 lb (150 kg)
Height adjustment	+ /- 3/16" (5)
Door height	118" (3000)
Tempered laminated/monolithic glass	Yes
Glass thickness	5/16"-1/2" (8-12)
Wood door thickness	Up to 1-31/32" (50)
Standard Finishes	150 Satin aluminum 113 Similar to satin stainless

# MUTO Premium Telescopic

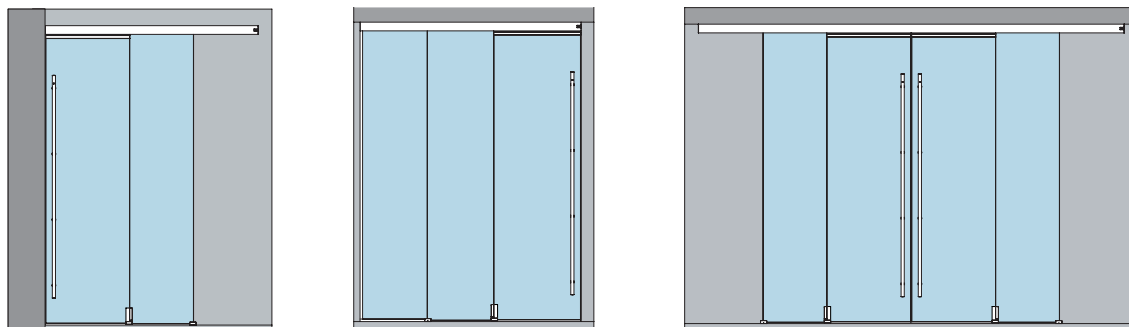

## Options

- Moving floor guides
- With or without handle
- Sidelites
- Single or bi-parting doors (2-panel and 4-panel)
- DORMOTION damping mechanism (DORMA SoftClose®)
- Door position status indicator

The easy MUTO Telescopic ordering process makes it simple to specify numerous solutions for single or bi-parting door systems, with or without sidelites.

## Door widths

Without DORMOTION

- Without handle:  
23-5/8"–47-1/4" (600–1200)  
(for both quick mover and slow mover panels)
- With handle:  
26-1/8"–49-3/4" (664–1264)  
(for slow mover panel)

With DORMOTION

- Without handle:  
31-1/8"–47-1/4" (791–1200)  
(for both quick mover and slow mover panels)
- With handle:  
33-5/8"–49-3/4" (854–1264)  
(for quick mover panel)  
28-1/2"–44-5/8" (724–1133)  
(for slow mover panel)



## Standard options

Mount	Direction	Panels	Sidelite	Ref. Number
Ceiling	Left	2	●	836.704
	Right			836.706
	Bi-parting	4		836.711
	Left	-		836.703
	Right	-		836.705
Wall	Left	2	-	836.701
	Right			836.702
	Bi-parting	4		836.709
Glass	Left	2	●	836.707
	Right			836.708
	Bi-parting	4		836.712

● yes — no

DORMA USA, Inc  
Dorma Drive, Drawer AC  
Reamstown, PA 17567  
800.523.8483

DORMA Canada  
1680 Courtney Park Dr  
Unit 13  
Mississauga, ON L5T 1R4  
800.387.4938