
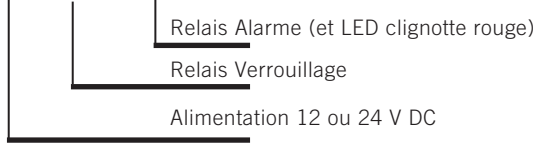


### Raccordement du verrouillage EM




### Relais de verrouillage

Le contact du relais est fermé si le verrouillage EM est alimenté et sa contreplaque électronique est correctement en place

### LED intégrée

LED éteinte:	Pas d'alimentation
LED rouge fixe:	Pas verrouillée
LED rouge clignotante:	<b>Alarme:</b> contre-plaque non reconnue
<b>LED verte :</b>	<b>Verrouillée</b>

### Sélection tension



### Caractéristiques techniques



Alimentation:	12 ou 24 V DC +20% / -10%
Consommation:	500 mA en 12 V DC 250 mA en 24 V DC
Protection:	Par VARISTOR intégrés
Contact relais:	Max 24 V DC et 2000 mA



Circuits sensibles à l'électricité statique

F

### Electromagnet connections

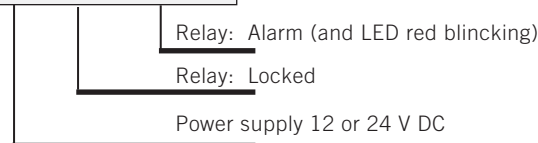


### Door locked contact

The door locked contact is closed if the electromagnet is powered and if the electronic armature plate is correctly in place.

### Integrated LED

LED off:	No power supply
LED red:	Unlocked
LED red and blinking	<b>Alarm:</b> It is not an electronic plate
<b>LED green :</b>	<b>Locked</b>

### Voltage selection



### Technical data

Power supply:	12 or 24 V DC +20% / -10%
Current input:	500 mA with 12 V DC 250 mA with 24 V DC
Protection:	By integrated VARISTOR
Contact:	Max 24 V DC and 2000 mA



Static sensitive devices

GB