


8916 / 8956 TDE, TDEH TRACK DOUBLE EGRESS - PULL SIDE MOUNT AND ACCESSORY PLATE BP89




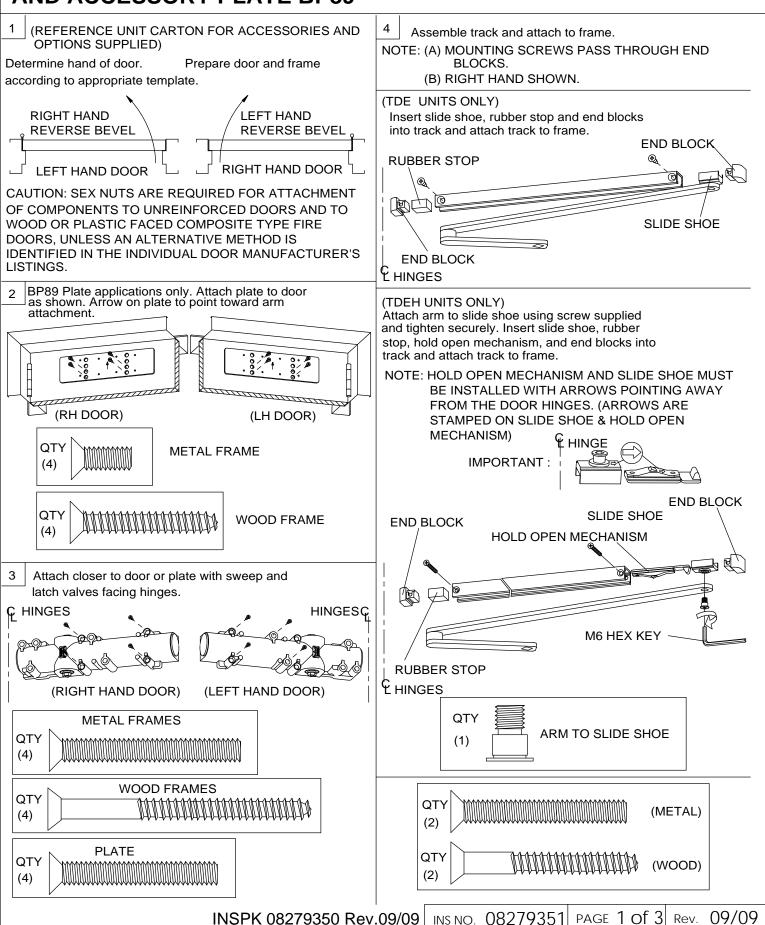

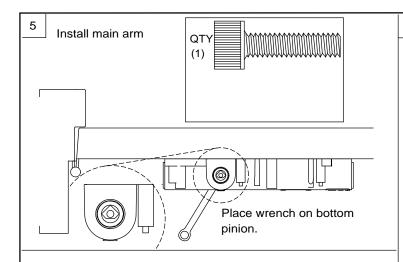

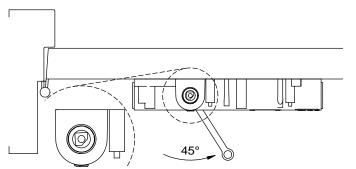


Rotate pinion 45° AWAY FROM HINGE edge of door.



onto top pinion. Fasten securely with pinion

NOTE: RIGHT HAND DOOR INSTALLATION SHOWN. LEFT HAND IS A MIRROR IMAGE.

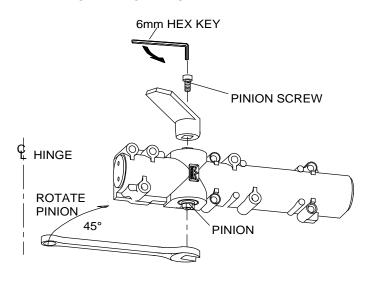

6 Adjust spring tension, if required, using a 1/4" wrench.

NOTE: 8916 supplied with size 4 spring setting. 8956 supplied with size 6 setting.

CRITICAL



SPRING TENSION ADJUSTER

8916 ONLY

BARRIER-FREE OPENINGS - Take an opening force reading from the pull on the door. If required, adjust the spring tension to meet the barrier-free requirement. Maximum number of turns counter clockwise=8. Maximum number of turns clockwise =14. Depending on opening conditions, a door adjusted to meet barrier-free forces may not have sufficient power to reliably close and latch the door.

NON-BARRIER-FREE OPENINGS - Adjust according to chart.

	CLOSER TYPE	DOOR WIDTH	FULL TURNS OF SPRING	SPRING SIZE
		INTERIOR	ADJUSTER	SIZE
	8916	2'-6"	0	4
		3'-0"	+4	5
		3'-6"	+12	6
	8956	3'-6"	0	6
		4'-0"	+6	6+

ULC LABELED UNITS ONLY

ADJUST SPRING TENSION ACCORDING TO THE FOLLOWING CHART.


	CLOSER TYPE	MAX. DOOR WEIGHT	SPRING SIZE	FULL TURNS OF SPRING ADJUSTING NUT
	8916	125	4	0
		150	5	+4
		200	6	+12
	8956	200	6	0
		250	6+	+6

7 Adjust sweep and latch valves.

Closing time from 90° to 15° (sweep range) is generally adjusted to take a minimum of 3 seconds. Closing time from 15° to fully closed (latch range) should take a minimum of 1.5 seconds.

Optional delayed action offers additional closing speed control when extra time is required to pass through the door. All valve adjustments are made with a 3/32" hex key.

CAUTION: DO NOT REMOVE VALVES.





INCREASE DECREASE

BACKCHECK OR DELAYED ACTION

NOTE: DELAYED ACTION IS AN OPTIONAL FEATURE.

INS NO. 08279351 | PAGE 2 Of 3 | Rev. 09/09



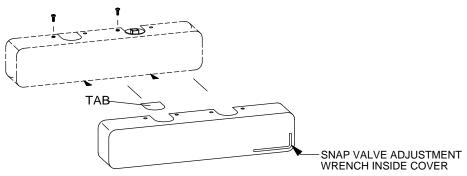


NOTE: LEFT HAND INSTALLATION SHOWN. RIGHT HAND IS A MIRROR IMAGE.




8 (HOLD OPEN UNITS ONLY)

Set hold open.

Place the hold open mechanism in desired position and tighten screw.



B To adjust hold open force, turn clockwise to increase force, and counter clockwise to weaken force.



To enable hold open,
push the white slide into
the hold open mechanism.
To disable hold open,
pull the white slide away
from hold open mechanism.

