RCI 0163 1/2" Rim Electric Strike





This solenoid rim strike is a surface-mounted electric strike designed to work with Pullman style rim exit device latches.

Features

- Designed to fit in tight situations where the exit device is mounted very close to the door frame, e.g. aluminum storefront applications
- Solenoid technology
- For maximum latch engagement, the strike keeper has been designed to pivot out of the strike body versus rolling out of the strike.
- •Accommodates 1/2" (13 mm) latch projection.
- •Horizontal adjustment ensures proper latch positioning to compensate for door misalignment up to 1/4" (6.4 mm).

- •Shims may be added to the strike cavity to engage with misaligned deadlatch.
- · Lockdown holes for secure mount.
- Cooler operation runs cool to the touch; no suppressor kit needed.
- High-grade stainless steel ensures superior strength and creates a sleek aesthetic.
- ·Non-handed.
- •Plug-in wire connectors.
- UL294 Listed for Access Control Unit Accessory.
- •UL1034 burglary-resistant Listed.



Energy 270mA 12VDC



Strength 1,500lbf Static 70ft-lb Dynamic



Warranty 5 Year Limited Warranty



Mode Fail-Secure




Endurance 500,000 Cycles



Monitoring Optional Latch Monitor Model Available

Specifications

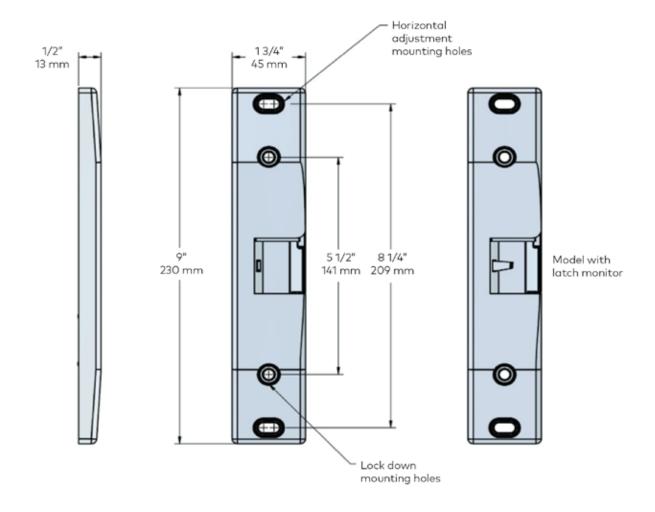

© dormakaba 2021 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.